

Ambient

Indirect



The Ambient is a surface wall mounted luminaire which offers both uplight as standard and uplight/downlight as an option to wash walls with light.

The uplight/downlight version is supplied as standard with a removable clear prismatic sheet which diffuses light down the wall.

Manufactured from CR4GP steel, pre-treated through a three stage iron phosphate system for paint adhesion and durability, and then finished with a white, high gloss, epoxy polyester power coated paint.

The profile has been designed for light to penetrate as far into the room as possible while providing diffused light on the wall.

The product has a fully finished welded body to minimize light spill and enhance aesthetics.

Available in both single or twin lamp versions.

This product comes with High Frequency control gear as standard but switch start and dimming options are available on request.

It is suggested that the leading edge of the fittings are installed above the average edge line @ approx. 1.9m to avoid glare.

Manufactured to BSEN 60598 specification and CE Marked to comply with EMC regulations.


Order Details

Luminaire Details (high frequency as standard)

Order Code	Nominal Size	Lamps	Weight (Kg)	Dimensions					
				(A) Width	(B) Height	(C) Length	(D) Fixings	(E) Fixings	
Uplight									
AMBU1x18	300 X 300	1 x 18w	1.80	280	105	300	190	60	
AMBU2x18	300 X 300	2x 18w	1.80	280	105	300	190	60	
AMBU1x40	300 X 600	1 x 40w	2.85	280	105	600	290	60	
AMBU2x40	300 X 600	2 x 40w	2.85	280	105	600	290	60	
AMBU1x55	300 X 600	1 x 55w	2.85	280	105	600	290	60	
AMBU2x55	300 X 600	2 x 55w	2.95	280	105	600	290	60	
Up/Downlight									
AMBUD2x18	300 X 300	2 x 18w	1.76	280	105	300	190	60	
AMBUD2x40	300 X 600	2 x 40w	2.83	280	105	300	290	60	
AMBUD2x55	300 X 600	2 x 55w	2.93	280	105	300	290	60	

Control Gear Variants - Suffix

Code	Description
HF	High Frequency Electronic
*HFR	High Frequency Dimming (Analogue 1-10V)
*DDC	Digital Dimming Control
* On specific models only	

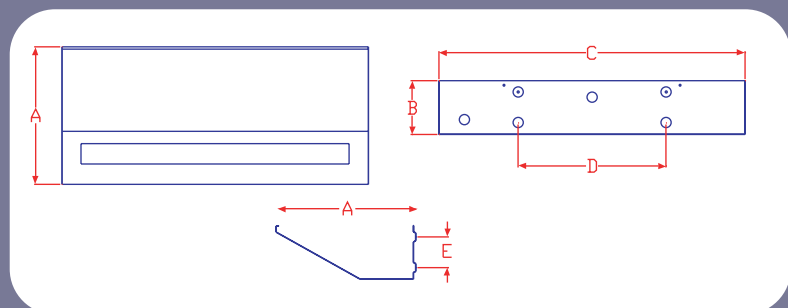

For application advice and lighting designs please contact our lighting services department on: **01747 858120**

The information, technical specification and photography contained in this literature is representative of general models correct at the time of going to press. In line with our policy of continuous improvement Dextra Lighting Systems PLC reserve the right to make any modifications necessary to parts or details without prior notice. The information contained in this publication does not form part of any contract.
1-0104

Dextra

For further information contact:

Dextra Lighting Systems plc


Brickfields Business Park, Gillingham, Dorset SP8 4PX

Direct Sales: 01747 858100 Freephone Fax: 0800 7838444

Email: sales@dextralighting.co.uk Website: www.dextralighting.co.uk

Ambient

Indirect

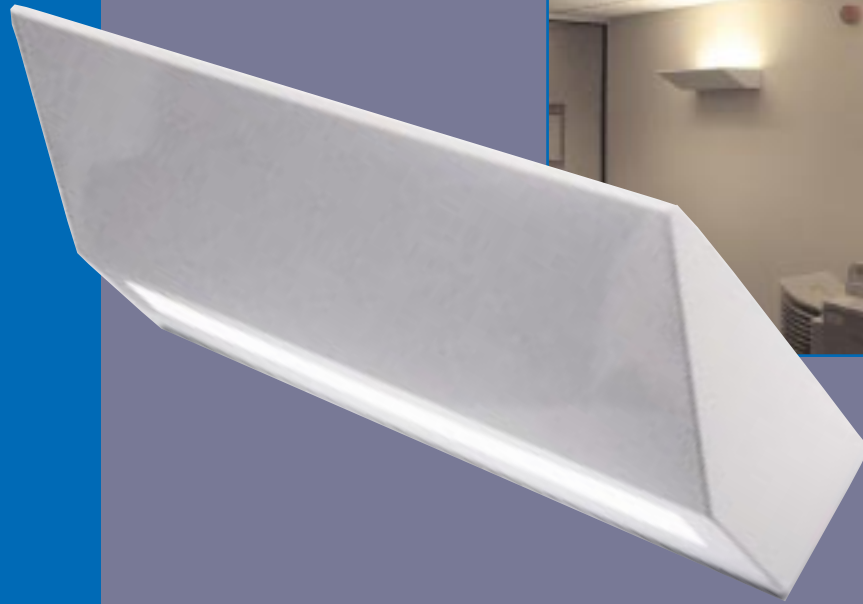

A wall mounted uplighter for compact fluorescent lamps giving forward and upward projection of light.

- Ideal for commercial, office or general circulation areas creating a relaxed environment.
- Aids compliance with CIBSE LG3 2001 requirement
- High frequency as standard
- Uplight as standard but available with up/downlight as an option
- Exclusive use of compact fluorescent lamps for 18w single to twin 55w TCL
- Designed and manufactured in modern facilities using sophisticated equipment and assembly methods

CE IP20 F



25
Years

Dextra