

Axant

Indirect



An Asymmetric ‘wall-wash’ luminaire which offers both vertical and angular illumination.

- The perfect solution to all energy efficient wall and display lighting requirements.
- Assists with compliance to LG3 2001 office requirements.
- Available in three models for Lay-in, Pull-up and Surface applications.
- High frequency control gear as standard.
- Fittings complete with lamps as standard.
- Designed and manufactured in modern facilities using sophisticated equipment and assembly methods.

CE IP20 F



25
Years

Dextra

Axant

Indirect

The Axant asymmetric 'wall-wash' luminaires are designed specifically to offer both vertical and angular illumination.

The exclusive use of compact fluorescent lamps up to 2 x 55 watt, ensure the Axant offers the perfect solution to all energy efficient wall and display lighting requirements. Supplied complete with C84 Triphosphor lamp(s) as standard.

High quality semi specular reflector for enhanced light output and low glare. White reflectors are available on request.

The lay-in version is designed to install into exposed 'T' ceilings, the pull-up into plasterboard and the surface via BEZA fixings.

When designed in conjunction with the comprehensive range of Dextra LG3 2001 65° compliant luminaires, the Axant provides illumination on the walls to comply with current office lighting requirements.

High frequency control gear comes as standard.


The Maxant fitting is a modular luminaire ideal for the perimeter of a room or retail environment giving wall illumination but also good vertical illumination.

Maxant louvre is attached to the body via wishbone springs for efficient installation and maintenance.

The luminaires are manufactured from CR4GPsteel, pre-treated through a three stage iron phosphate system for paint adhesion and durability, and then finished with a white, high gloss, epoxy polyester powder coated paint.

Constructed to a high standard under CE legislation and current regulations.

Axant 1200 x 300 pull-up

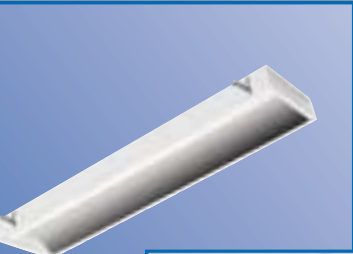

Axant 600 x 300 Lay-in



Maxant 600 x 600 Lay-in

Order Details

Luminaire Details

Order Code	Nominal Size	Weight (kg)	Control Gear	Dimensions			
				A (LENGTH)	B (SURFACE FIXING DETAILS)	C (WIDTH)	D (CUT OUT)
LAY-IN LUMINAIRE DETAILS							
AXTR 631x40w TC-L HF	600 x 300	2.60	1 x 40W High Frequency	594	-	283	-
AXTR 1232x40w TC-L HF	1200 x 300	4.60	2 x 40W High Frequency	1194	-	283	-
AXTR 631x55w TC-L HF	600 x 300	2.60	1 x 55W High Frequency	594	-	283	-
AXTR 1232x55w TC-L HF	1200 x 300	4.60	2 x 55W High Frequency	1194	-	283	-
AXTRT5 114/124	600 x 300	2.45	1 x 14W HE/ 24W HO T5	594	-	283	-
AXTRT5 128/154	1200 x 300	4.47	1 x 28W HE/ 54W HO T5	1194	-	283	-
PULL-UP LUMINAIRE DETAILS							
AXTP 631x40w TC-L HF	600 x 300	2.95	1 x 40W High Frequency	599	-	299	585 x 285
AXTP 1232x40w TC-L HF	1200 x 300	5.30	2 x 40W High Frequency	1199	-	299	1185 x 285
AXTP 631x55w TC-L HF	600 x 300	2.95	1 x 55W High Frequency	599	-	299	585 x 28
AXTP 1232x55w TC-L HF	1200 x 300	5.30	2 x 55W High Frequency	1199	-	299	1185 x 285
SURFACE LUMINAIRE DETAILS							
AXTS 631x40w TC-L HF	600 x 300	2.95	1 x 40W High Frequency	594	300	283	-
AXTS 1232x40w TC-L HF	1200 x 300	5.30	2 x 40W High Frequency	1194	600	283	-
AXTS 631x55w TC-L HF	600 x 300	2.95	1 x 55W High Frequency	594	300	283	-
AXTS 1232x55w TC-L HF	1200 x 300	5.30	2 x 55w High Frequency	1194	600	283	-



MAXANT TCL RECESSED LAY-IN LUMINAIRE DETAILS

Order Code	Nominal Size	Weight (kg)	Control Gear	Dimensions				
				A	B	C	D	E
MAXTR S40 + 218/LB	600 x 600	5.3	1 x 40W TCL + 2 X 18W T8	618	594	569	594	90
MAXTR S55 + 218/LB	600 x 600	5.3	1 x 55W TCL + 2 X 18W T8	618	594	569	594	90
MAXTR S40 + 218/C2	600 x 600	5.5	1 x 40W TCL + 2 X 18W T8	618	594	569	594	90
MAXTR S55 + 218/C2	600 x 600	5.5	1 x 55W TCL + 2 X 18W T8	618	594	569	594	90

N.B. Maxant fittings are for use in expose tee ceilings only.

Accessories - Suffix

Code	Description
HFR	High Frequency Dimming (Analogue 1-10V)
DDC	Digital Dimming Control

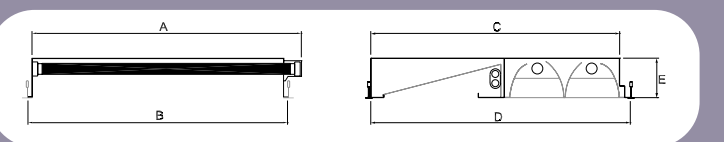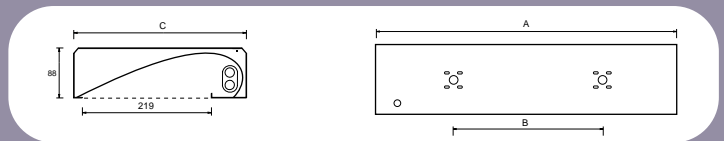

For application advice and lighting designs please contact our lighting services department on: **01747 858120**

The information, technical specification and photography contained in this literature is representative of general models correct at the time of going to press. In line with our policy of continuous improvement Dextra Lighting Systems PLC reserve the right to make any modifications necessary to parts or details without prior notice. The information contained in this publication does not form part of any contract.
9-0304

Dextra

For further information contact:

Dextra Lighting Systems plc

Brickfields Business Park, Gillingham, Dorset SP8 4PX

Direct Sales: 01747 858100 Freephone Fax: 0800 7838444

Email: sales@dextralighting.co.uk Website: www.dextralighting.co.uk