

New DexT5

Recessed



DexT5

- A high quality slimline fitting that utilises the latest technology for installation into a variety of ceiling types.
- DXLT5 is for use in 15mm or 24mm expose tee ceilings only.
- DXT5 is designed for installation into both 15mm or 24mm exposed tee bar ceilings or pull up with the use of the slide out side arm supports.
- Louvres are retained into the body of the fitting by the use of shoot bolts.
- The DexT5 is a low profile luminaire ideal for restricted ceiling voids, when installed from below using the side arm supports only 63mm is recessed.
- Exclusive use of colour 84 T5 lamps and high frequency control gear for maximum efficiency and quality of light.
- Available in 2, 3 and 4 lamp versions.
- Complete with C84 HE lamps as standard.

CE IP20



25
Years


Dextra

New DexT5


Recessed



DXT5 414 c/w LG3 2001 65°
Louvre

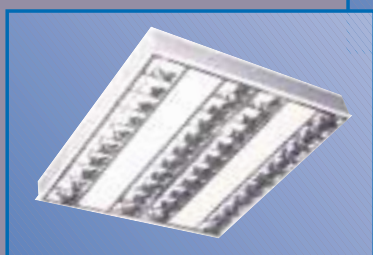

DXLT5 414 c/w LG3 2001 65° Louvre

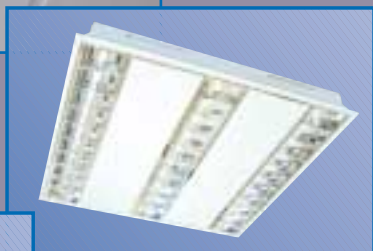

DXT5 314 c/w LG3 2001 65°
Louvre

The DXT5 fitting is a universal fully boxed luminaire that readily installs into a wide variety of ceiling types, including exposed tee, spring tee and plasterboard utilising the slide out side arm supports.

Louvres are retained into the body of the fitting by the use of shoot bolts.

Manufactured from CR4GP steel, pre-treated through a three stage iron phosphate system for paint adhesion and durability, and then finished with a white, high gloss, epoxy polyester powder coated paint.

Designed to suit our robotic wire and test equipment for optimum quality and reliability.

Available with a choice of high efficiency T5 Triphosphor Colour 84 lamps that are supplied as standard, offering a superior light output, low energy lighting solution.

High frequency control gear is supplied as standard to enhance energy efficiency, but should more flexibility of control be required analogue and digital dimming options are also available.



3 hour maintained emergency versions available as standard on all models.

Specific modifications to the product range may be available on request, such as high output lamps and alternative ceiling solutions.

Manufactured to BSEN 60598 specification and CE marked to comply with EMC regulations.

Full technical data sheet and photometrics available on request.

A free and comprehensive design facility can be accessed through our lighting services department.

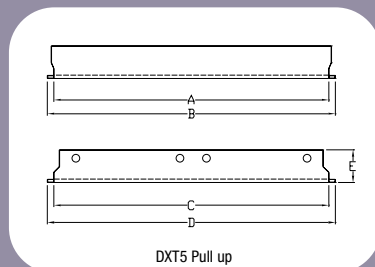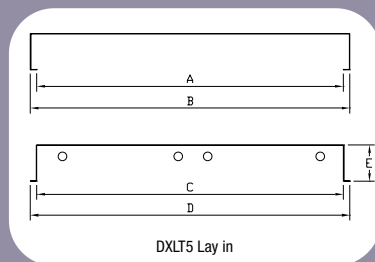

Order Details

Luminaire Details


Order Code	Nominal Size	Lamps	Weight(kg)	Dimensions (mm)				
				A	B	C	D	E
DXLT5 314/324	600 x 600	3 x 14W HE / 24W HO	4.30	570	594	570	594	68
DXLT5 414/424	600 x 600	4 x 14W HE / 24W HO	4.30	570	594	570	594	68
DXLT5 228/254	1200 x 600	2 x 28W HE / 54W HO	7.50	1170	1194	570	594	68
DXLT5 328/354	1200 x 600	3 x 28W HE / 54W HO	8.10	1170	1194	570	594	68
DXLT5 428/454	1200 x 600	4 x 28W HE / 54W HO	8.10	1170	1194	570	594	68
DXLT5 123 228/254	1200 x 300	2 x 28W HE / 54W HO	4.30	1170	1194	270	294	68
DXT5 214/224	600 x 600	2 x 14W HE / 24W HO	3.90	570	597	570	597	68
DXT5 314/324	600 x 600	3 x 14W HE / 24W HO	4.10	570	597	570	597	68
DXT5 414/424	600 x 600	4 x 14W HE / 24W HO	4.10	570	597	570	597	68
DXT5 228/254	1200 x 600	2 x 28W HE / 54W HO	7.50	1170	1197	570	297	68
DXT5 328/354	1200 x 600	3 x 28W HE / 54W HO	7.90	1170	1197	570	597	68
DXT5 428/454	1200 x 600	4 x 28W HE / 54W HO	8.00	1170	1197	570	597	68

Control Gear Variants - Suffix:

HFR	High Frequency Dimming (Analogue 1-10V)
DDC	Digital Dimming Control
E3	3 Hour Maintained Emergency Pack (Integral)
ST3	Self Test

louvers - Suffix:

C2	LG3 2001 65° (LG3 1996 CAT 2) Louvre
LB	Ribbed Crossblade Low Brightness Louvre
PP	For Prismatic Diffuser option use Gen 300 fitting (Dimensions differ from DXLT5 and DXT5 range)

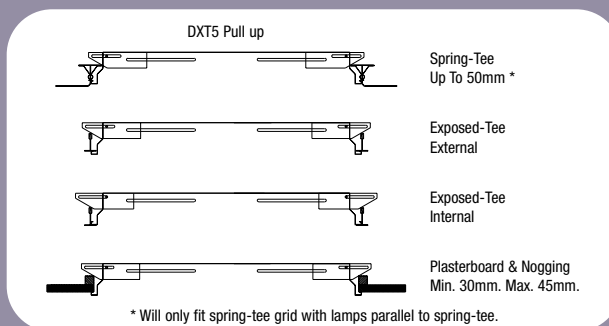

For application advice and lighting designs please contact our lighting services department on: **01747 858120**

The information, technical specification and photography contained in this literature is representative of general models correct at the time of going to press. In line with our policy of continuous improvement Dextra Lighting Systems PLC reserve the right to make any modifications necessary to parts or details without prior notice. The information contained in this publication does not form part of any contract.
05-0304

Dextra

For further information contact:

Dextra Lighting Systems plc

Brickfields Business Park, Gillingham, Dorset SP8 4PX

Direct Sales: 01747 858100 Freephone Fax: 0800 7838444

Email: sales@dextralighting.co.uk Website: www.dextralighting.co.uk