


# Edge

Surface

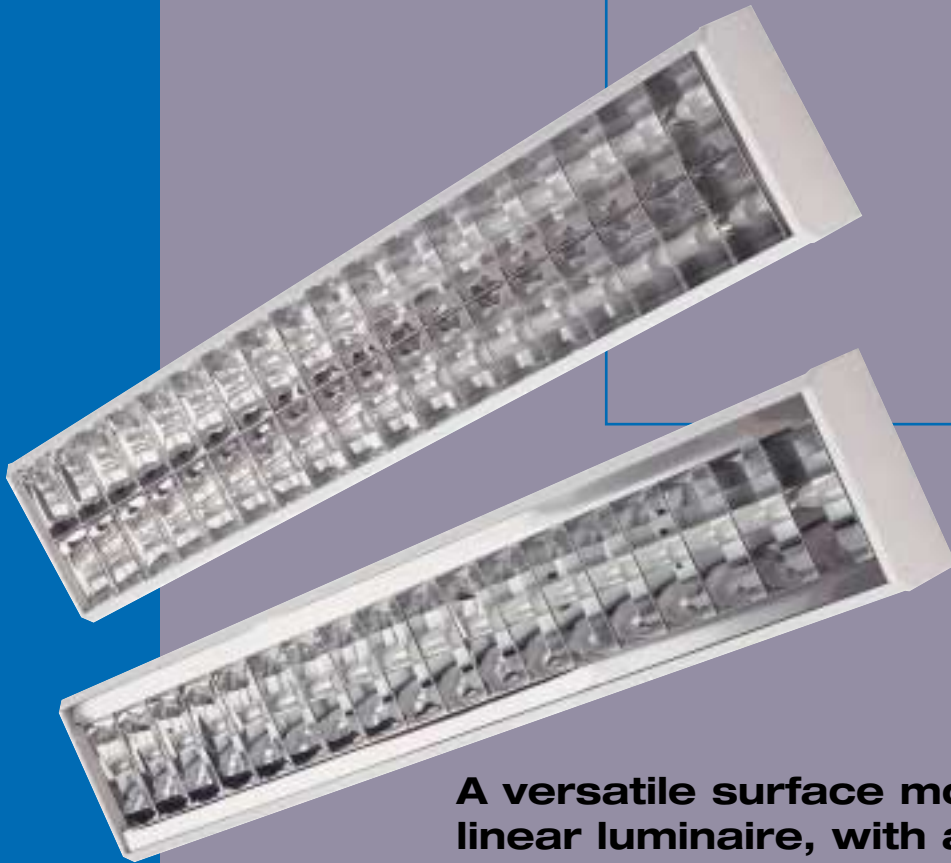

**A versatile surface mounted linear luminaire, with attractive low profile body.**

- Profiled body style complemented with durable injection moulded end-caps.
- A comprehensive range of 'lift and tilt' controllers include LG3 2001 65° louvres, low brightness and prismatic panels TP(b).
- Compatible with all generally used control gear and emergency options.
- Body profile allows for continuous run mounting and optional bi-directional light distribution.
- Designed and manufactured in modern facilities using sophisticated equipment and assembly methods.

CE IP20 F




25  
Years

**Dextra**

# Edge

## Surface

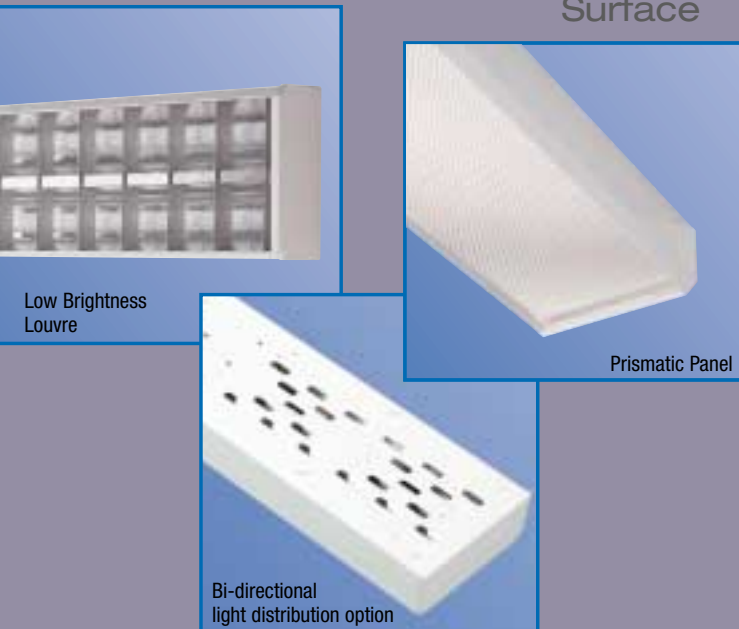

Attractive low profile body with chamfered sides and durable injection moulded end caps. Particularly well suited to areas of restricted ceiling height.

Manufactured from CR4GP steel, pre-treated through a three stage iron phosphate system for paint adhesion and durability, and then finished with a white, high gloss, epoxy polyester powder coated paint.

Designed to suit our robotic wire and test equipment.

Available with both single and twin lamp variants.

A wide selection of control gear is available including switch start, high frequency electronic, analogue dimming and digital dimming systems.

All controllers are of the 'lift and tilt' variety.

3 hour maintained emergency versions available (excluding 2ft version).


Controller options include wedge crossblade louvres compliant with LG3 2001 65°, general purpose low brightness louvres and prismatic panels.

Bi-directional light distribution available on request, with optional suspension kit to assist compliance with LG3 2001.

Manufactured to BSEN 60598 specification and CE Marked to comply with EMC regulations.

Full technical data sheet and photometrics available on request.

A free, comprehensive design facility can be accessed through our Lighting Services Department.

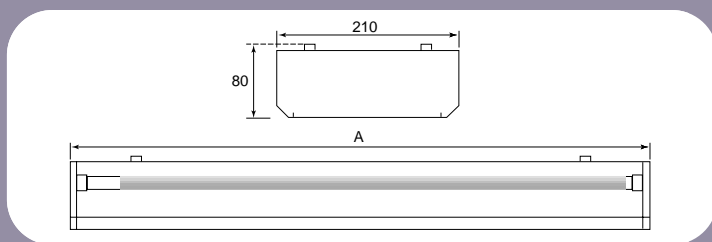

## Order Details

### Luminaire Details (Switch Start as standard)

| Order Code | Nominal Size | Lamps   | Weight (kg) | Dimensions |     |     |
|------------|--------------|---------|-------------|------------|-----|-----|
|            |              |         |             | A          | B   | C   |
| NUE 118*   | 600 x 200    | 1 x 18w | 3.2         | 666        | 300 | 300 |
| NUE 218*   | 600 x 200    | 2 x 18w | 3.4         | 666        | 300 | 300 |
| NUE 136    | 1200 x 200   | 1 x 36w | 3.9         | 1276       | 750 | 600 |
| NUE 236    | 1200 x 200   | 2 x 36w | 4.6         | 1276       | 750 | 600 |
| NUE 158    | 1500 x 200   | 1 x 58w | 4.7         | 1576       | 900 | 600 |
| NUE 258    | 1500 x 200   | 2 x 58w | 5.6         | 1576       | 900 | 600 |
| NUE 170    | 1800 x 200   | 1 x 70w | 5.6         | 1840       | 900 | 600 |
| NUE 270    | 1800 x 200   | 2 x 70w | 6.6         | 1840       | 900 | 600 |


\* Not available in Emergency

### Control Gear Variants - Suffix


| Code | Description                                 |
|------|---|
| HF   | High Frequency Electronic                   |
| HFR  | High Frequency Dimming (Analogue 1-10V)     |
| DDC  | Digital Dimming Control                     |
| ES   | Electronic Starters                         |
| E3   | 3 Hour Maintained Emergency Pack (Integral) |

### Louvres/Panels/Options - Suffix

| Code  | Description                              |
|-------|--|
| C2    | LG3 2001 65° (LG3 1996 CAT 2) Louvre     |
| LB    | Ribbed Crossblade Low Brightness Louvre  |
| PP    | Prismatic Panel TP(b)                    |
| TP(a) | Prismatic Panel TP(a)                    |
| BD    | Bi-directional light distribution option |
| SK    | Suspension Kit                           |

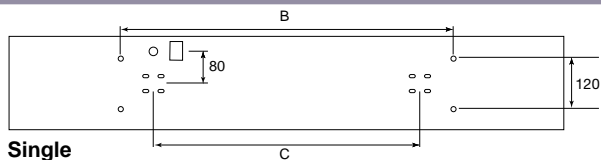

Single

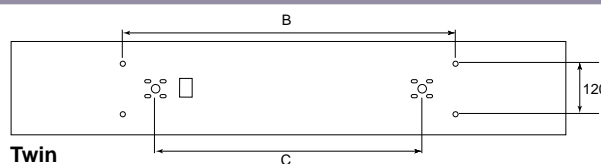

Twin

For application advice and lighting designs please contact our lighting services department on: **01747 858120**

The information, technical specification and photography contained in this literature is representative of general models correct at the time of going to press. In line with our policy of continuous improvement Dextra Lighting Systems PLC reserve the right to make any modifications necessary to parts or details without prior notice. The information contained in this publication does not form part of any contract.

8-0304

# Dextra

For further information contact:

Dextra Lighting Systems plc

Brickfields Business Park, Gillingham, Dorset SP8 4PX

Direct Sales: 01747 858100 Freephone Fax: 0800 7838444

Email: sales@dextralighting.co.uk Website: www.dextralighting.co.uk