Lowbay

Industrial

- Optimum illumination and low operation costs.
- Robust body design, powder coated for added protection.
- Multi punched for alternative methods of fixing on site.
- User friendly connection on detachable and pivoting gear tray.
- Available with all commonly used accessories.
- High output tubular MBI/SON lamps supplied as standard.
- Designed and manufactured in modern facilities using sophisticated equipment and assembly methods.

CE IP10 F

REGISTERED FIRM BM TRADA CERTIFICATION ISO 9001:2000

UKAS QUALITY MANAGEMENT 012

25 Years

Dextra

Lowbay

Industrial

The Tracer offers several fixing methods for fast efficient installation, these include chain mounting, drop rod and direct to conduit etc.

The luminaire is manufactured from CR4GP steel, pre-treated through a three stage iron phosphate system for paint adhesion and durability, and then finished with a white, high gloss, epoxy polyester powder coated paint.

Supplied as standard with a hammertone finish aluminium reflector.

Specular aluminum high rack reflector version also available, particularly suited to warehouse applications.

Superimposed ignitors used in all fittings for extended lamp life and efficiency.

High output tubular MBI/SON lamps supplied as standard. Special lamp combinations available on request.

Control gear is mounted on a removable pivoting gear tray. Thus enabling the Contractor to install the body before the weight of the control gear is added.

Mains connection via an appropriately fused terminal block.

Standard control gear is of mains frequency wound type suitable for operation on 230/240V 50Hz.

A wide range of attachments are retained by the use of an end rail.

A tungsten halogen pre-strike option is available using a linear R7S 300W lamp (included).

Manufactured to BSEN 60598 specification and CE Marked to comply with EMC regulations.

Full technical data sheet and photometrics available on request.

A free, comprehensive design facility can be accessed through our Lighting Services Department.

Order Details

Luminaire Details

Order Code	Lamp	Weight (kg)	Dimensions		
			D	L	W
TRS150L	150W SON	8.5	190	600	320
TRS250L	250W SON	9.4	190	600	320
TRS400L	400W SON	11.2	190	600	320
TRH150L	150W MBI	8.8	190	600	320
TRH250L	250W MBI	8.6	190	600	320
TRH400L	400W MBI	9.5	190	600	320
TRM250L	250W MBF	8.5	190	600	320
TRM400L	400W MBF	9.3	190	600	320

Accessories - Suffix

Code	Description	Weight (kg)
TRPC	Polycarbonate Cover	0.3
TRGC	Soda Lime Glass Cover	-
(inclusive with MBI's)		1.2
TRWG	Wire Guard	0.4
TRPS	Tungsten Halogen Pre-Strike	
Monitor c/w Lamp		0.2
TRWL	Louvre White	0.35
TRHR	High Rack 10 Facet Reflector	-
TRTI	Timed Igniters	-

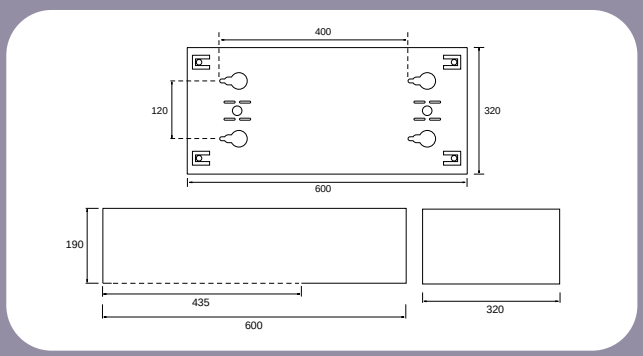

For application advice and lighting designs please contact our lighting services department on: **01747 858120**

The information, technical specification and photography contained in this literature is representative of general models correct at the time of going to press. In line with our policy of continuous improvement Dextra Lighting Systems PLC reserve the right to make any modifications necessary to parts or details without prior notice. The information contained in this publication does not form part of any contract.
5-0304

Dextra

For further information contact:
Dextra Lighting Systems plc
Brickfields Business Park, Gillingham, Dorset SP8 4PX
Direct Sales: 01747 858100 Freephone Fax: 0800 7838444
Email: sales@dextralighting.co.uk Website: www.dextralighting.co.uk