

A range of heavy duty products which has become a virtual byword for durability, strength and reliability.

Duraplug offers a wide range of products including a complete range of safety extension leads featuring rubber covered plugs, extension leads, trailing sockets, lead connectors and cable couplers. All Duraplug products are made from top quality, high impact resistant materials such as ABS/polycarbonate and rubber.



TECHNICAL HOTLINE +44 (0)1268 563720

PORTABLE POWER

## HEAVY DUTY EXTENSION LEADS

## HEAVY DUTY PORTABLE SOCKET

13 AMP  
FOUR WAY

FOUR WAY

FOUR WAY

SINGLE & DOUBLE

13 AMP  
FILTERED  
FOUR WAY



EXL 135 WHI EXL 135 BLK



EXL 136 WHI EXL 136 BLK



EXL 137 WHI EXL 137 BLK



EXL 131 WHI

EXL 132 WHI



744 WHI

**EXL 135 WHI**  
**EXL 135 WHI DPK**  
**EXL 135 BLK**  
13 AMP WITH FUSE,  
NEON AND 2 METRE CABLE

**1**  
**1**  
**1**

**EXL 136 WHI**  
**EXL 136 BLK**  
13 AMP WITH SWITCH,  
NEON AND 2 METRE CABLE

**1**  
**1**

**EXL 137 WHI**  
**EXL 137 BLK**  
13 AMP WITH FUSE,  
SWITCH, NEON AND  
2 METRE CABLE

**1**  
**1**

**EXL 131 WHI DPK**  
13 AMP  
SINGLE SOCKET  
WITH 4 METRE CABLE

**1**

**EXL 132 WHI DPK**  
13 AMP  
DOUBLE SOCKET  
WITH 4 METRE CABLE

**1**

**744 WHI**  
13 AMP  
WITH SWITCH,  
NEON AND FUSE

**1**

Fitted with approved PVC insulated cable of appropriate core size for maximum 13A rating and a Duraplug rubber plug.

The sockets are manufactured in high impact ABS/Polycarbonate.  
BS.1363/A  
BS.6500: 1994/IEC 227-5

Fitted with approved PVC insulated cable of appropriate core size for maximum 13A rating and a Duraplug rubber plug.

The sockets are manufactured in high impact ABS/Polycarbonate.  
BS.1363/A  
BS.6500: 1994/IEC 227-5

Fitted with approved PVC insulated cable of appropriate core size for maximum 13A rating and a Duraplug rubber plug.

The sockets are manufactured in high impact ABS/Polycarbonate.  
BS.1363/A  
BS.6500: 1994/IEC 227-5

Fitted with approved PVC insulated cable of appropriate core size for maximum 13A rating and a Duraplug rubber plug.

The sockets are manufactured from high impact resistant Polypropylene with tough rubber covers.  
BS.1363/A  
BS.6500: 1994/IEC 227-5

Fitted with a fuse carrier and 13 amp fuse to BS. 1362. Manufactured in high impact ABS/Polycarbonate.

Can also be wall mounted.  
DIMENSIONS:  
317 x 68 x 31mm  
SPECIFICATION:  
Max. Power 3.14kW  
Response time (Varistor)  
better than 20ns  
BS.1363/A

PORTABLE POWER

## HEAVY DUTY PORTABLE SOCKET


13 AMP  
FOUR WAY

FOUR WAY

FOUR WAY

## HEAVY DUTY TRAILING SOCKETS

13 AMP  
SINGLE & DOUBLE

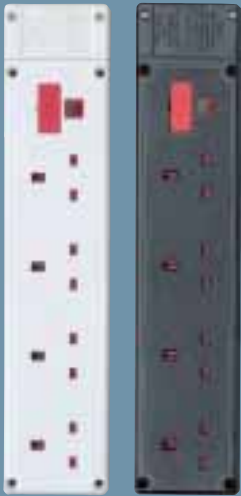

FC 4134 WHI FC 4134 BLK



FC 4135 WHI FC 4135 BLK



FC 4136 WHI FC 4136 BLK



FC 133 WHI



FC 133 ORG



FC 133 BLK



FCT 133 WHI



FCT 133 BLK



FC 153 BLK

**FC 4134 WHI** **1**  
**FC 4134 WHI DPK** **1**  
**FC 4134 BLK** **1**  
**FC 4134 BLK DPK** **1**  
 13 AMP  
 WITH FUSE  
 AND NEON

**FC 4135 WHI** **1**  
**FC 4135 BLK** **1**  
 13 AMP  
 WITH SWITCH  
 AND NEON

**FC 4136 WHI** **1**  
**FC 4136 BLK** **1**  
 13 AMP  
 WITH SWITCH,  
 FUSE AND NEON

**FC 133 WHI** **10**  
**FC 133 WHI DPK** **10**  
**FC 133 BLK** **10**  
**FC 133 BLK DPK** **10**  
**FC 133 ORG** **10**  
**FC 133 ORG DPK** **10**  
 13 AMP  
 SINGLE OUTLET

**FCT 133 WHI** **10**  
**FCT 133 WHI DPK** **5**  
**FCT 133 BLK** **10**  
**FCT 133 BLK DPK** **5**  
**FCT 133 ORG** **10**  
**FCT 133 ORG DPK** **5**  
 13 AMP  
 TWIN OUTLET

**FC 153 BLK** **10**  
 15 AMP  
 SINGLE OUTLET  
 ROUND PIN

Manufactured in high impact  
 ABS/Polycarbonate  
 incorporating optional wall  
 mounting holes and equal length  
 wire stripping.

DIMENSIONS:  
 317 x 68 x 31mm  
 BS.1363/A

Manufactured in high impact  
 ABS/Polycarbonate  
 incorporating optional wall  
 mounting holes and equal length  
 wire stripping.

DIMENSIONS:  
 317 x 68 x 31mm  
 BS.1363/A

Manufactured in high impact  
 ABS/Polycarbonate  
 incorporating optional wall  
 mounting holes and equal length  
 wire stripping.

DIMENSIONS:  
 317 x 68 x 31mm  
 BS.1363/A

FC 133 and FCT 133  
 Manufactured from tough  
 Polypropylene with rubber cover. All  
 internal component parts are  
 retained in the base for ease of  
 wiring.

BS.1363/A

FC 153  
 Manufactured from rubber with  
 nylon shutter.

BS.546

DIMENSIONS:  
 FC 133: 79 x 62 x 29mm  
 FCT 133: 80 x 125 x 29mm  
 FC 153: 67 x 53 x 33mm

Some products are available  
 in special merchandising  
 packs. These are identified  
 by the DPK suffix on the list  
 number

## LEAD CONNECTORS

10 AMP  
TWO & THREE PIN

SPARES

## RUBBER PLUGS

## CABLE COUPLERS



LCP 102 BLU



LCP 103 BLK



LCP 103 WHI



LCP 102P BLK



LCP 102S BLK



LCP 103S BLK



LCP 103P BLK



LCP 103P WHI



PF 133 WHI



PF 133 ORG



PF 133 BLK



CCP 133 BLK



CCP 153 BLK



- LCP 102 BLK 10
- LCP 102 BLK DPK 10
- LCP 102 BLU 10
- LCP 102 ORG 10
- LCP 102 ORG DPK 10
- TWO PIN 10 AMP PLUG AND SOCKET
- LCP 103 WHI 10
- LCP 103 WHI DPK 10
- LCP 103 BLK 10
- LCP 103 BLK DPK 10
- THREE PIN 10 AMP PLUG AND SOCKET

- LCP 102P BLK 10
- LCP 102P BLU 10
- LCP 102P ORG 10
- LCP 102P ORG DPK 10
- 10 AMP PLUG TWO PIN
- LCP 102S BLK 10
- LCP 102S BLU 10
- LCP 102S ORG 10
- 10 AMP SOCKET TWO PIN

- LCP 103P WHI 10
- LCP 103P BLK 10
- 10 AMP PLUG THREE PIN
- LCP 103S WHI 10
- LCP 103S BLK 10
- 10 AMP SOCKET THREE PIN

- P 53 BLK 10
- 5 AMP
- PF 133 WHI 10
- PF 133 ORG 10
- PF 133 BLK 10
- FITTED WITH 13 AMP FUSE
- P 153 BLK 10
- 15 AMP

- CCP 53 BLK 1
- 5 AMP PLUG & SOCKET
- CCP 133 BLK 1
- 13 AMP PLUG & SOCKET
- CCP 153 BLK 1
- 15 AMP PLUG & SOCKET
- CCP 133P BLK 1
- SPARE 13 AMP PLUG

This range of connectors provides a safe and easy method of extending power cables and electrical tools and appliances. With rubber cover and polypropylene inserts with integral cable grips. Retaining lugs prevent accidental disconnection.

Two pin versions are only for use with double insulated Class 2 appliances.

Three pin versions must be used with earthed appliances.

DIMENSIONS:  
40 x 25 x 80mm  
BS.5733/A: 1995

BS.5733/A: 1995

BS.5733/A: 1995

**PF 133** With rubber cover and ABS/Polycarbonate base. Available with alternative fuse ratings to special order only. Approved by ASTA Licence no.99.

BS.1363/A Pt.1: 1995

**P 53 BLK** Manufactured in rubber

**P 153 BLK** With rubber cover and ABS/Polycarbonate base.

BS.546: 1950

**These splashproof couplers are a rugged means of connecting cables in industrial and commercial environments. Fitted with heavy duty cable clamps, tapered cable entry and fuse (13 amp version only).**

DIMENSIONS:  
Diameter x Length  
CCP 53: 60 x 173mm  
CCP 133: 65 x 182mm  
CCP 153: 68 x 180mm

BS.5733  
(BS.1363 Pin centres for 13 amp versions)  
BS.5733  
(BS.546 Pin centres for 5 and 15 amp versions)