

DECORATIVE




The style, the edge.

Edge is a range of electrical accessories that combine function and style. The design is smooth, clean and the products are very slim – in fact just 1.5mm.

There is a wide range of finishes to choose from and a custom design service means the products you need can be made to match almost any colour you require.

Matching Rocker Switches

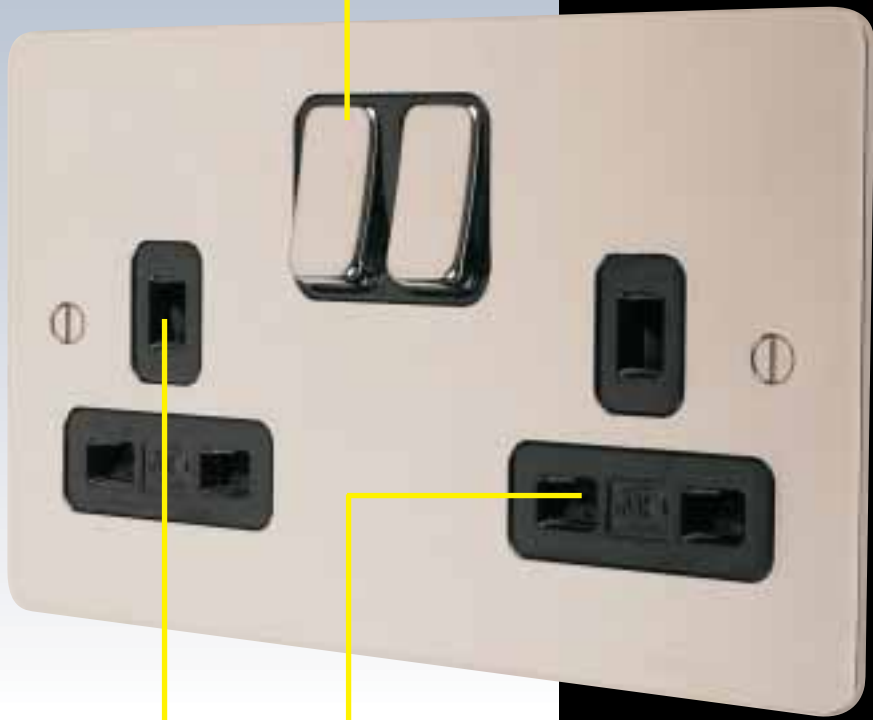


Black or white insert option on most products

MK's unique 3 pin operated safety shutter makes Edge sockets the safest available

Very slim profile frontplates of only 1.5mm. Flat head screws throughout

Ten high quality finishes to choose from



Modular data accessories in Euro and LU6C formats.



Brass products have a unique finishing process making them scratch resistant and not susceptible to corrosion or discolouration. The finish is guaranteed for twenty years.



Advanced technology makes Edge dimmers compatible with tungsten, low voltage, halogen and electronic transformer lighting. A soft start feature prolongs the lamp life.





A Custom Design Service to match almost any colour you may require. This includes matching RAL colours as well as offering a wide choice of anodised aluminium finishes.

ANTIQUÉ BRONZE
Due to the special processes required to obtain the authentic finish there will be a slight finish variation between ABR products.

DECORATIVE

SWITCHSOCKET
OUTLETS

1 GANG DP DUAL EARTH 13 AMP	1 GANG DP WITH NEON DUAL EARTH 13 AMP	NON STANDARD 1 GANG DP CLEAN EARTH 13 AMP	2 GANG DP DUAL EARTH 13 AMP	2 GANG DP CLEAN EARTH 13 AMP	2 GANG DP WITH NEON DUAL EARTH 13 AMP
-----------------------------------	--	--	-----------------------------------	------------------------------------	--



FINISHES

BRUSHED STAINLESS STEEL STD OPT	K14357 BSS W K14357 BSS B	K14657 BSS W K14657 BSS B	K14268 BSS W K14268 BSS B	K14347 BSS W K14347 BSS B	K14345 BSS W K14345 BSS B	K14647 BSS W K14647 BSS B
POLISHED BRASS OPT STD	K14357 PBR W K14357 PBR B	K14657 PBR W K14657 PBR B	K14268 PBR W K14268 PBR B	K14347 PBR W K14347 PBR B	K14345 PBR W K14345 PBR B	K14647 PBR W K14647 PBR B
SILVER ANODISED ALUMINIUM STD OPT	K14357 SAA W K14357 SAA B	K14657 SAA W K14657 SAA B	K14268 SAA W K14268 SAA B	K14347 SAA W K14347 SAA B	K14345 SAA W K14345 SAA B	K14647 SAA W K14647 SAA B
POLISHED CHROME OPT STD	K14357 POC W K14357 POC B	K14657 POC W K14657 POC B	K14268 POC W K14268 POC B	K14347 POC W K14347 POC B	K14345 POC W K14345 POC B	K14647 POC W K14647 POC B
WHITE STD	K14357 WHI W	K14657 WHI W	K14268 WHI W	K14347 WHI W	K14345 WHI W	K14647 WHI W
BLACK ANODISED ALUMINIUM STD	K14357 BLA B	K14657 BLA B	K14268 BLA B	K14347 BLA B	K14345 BLA B	K14647 BLA B
POLISHED BRONZE STD	K14357 PBZ B	K14657 PBZ B	K14268 PBZ B	K14347 PBZ B	K14345 PBZ B	K14647 PBZ B
ANTIQU BRONZE STD	K14357 ABR B	K14657 ABR B	K14268 ABR B	K14347 ABR B	K14345 ABR B	K14647 ABR B
GOLD PLATED SPECIAL ORDER OPT STD	K14357 GLD W K14357 GLD B	K14657 GLD W K14657 GLD B	K14268 GLD W K14268 GLD B	K14347 GLD W K14347 GLD B	K14345 GLD W K14345 GLD B	K14647 GLD W K14647 GLD B
BRUSHED BRASS SPECIAL ORDER OPT STD	K14357 BBR W K14357 BBR B	K14657 BBR W K14657 BBR B	K14268 BBR W K14268 BBR B	K14347 BBR W K14347 BBR B	K14345 BBR W K14345 BBR B	K14647 BBR W K14647 BBR B

- W** White Inserts
- B** Black Inserts
- STD** Standard Black or White
- OPT** Option Black or White

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.1363 Pt. 2: 1995
Neon is only available
in white or black rocker.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.1363 Pt. 2: 1995
(where relevant)
These products are
provided with facilities
for 'clean earth'
connections and are
suitable for non-
standard plugs with 'T'
shaped earth pins.

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995
Neon is only available
in white or black rocker.

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA, PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

Dual Earth
Fitted with two earth terminals to provide a double earth facility for use when installations are to comply with Regulation 607 of BS.7671 IEE Wiring Regulations

Dual Earth (see note box)

Dual Earth (see note box)

SOCKET OUTLETS

NON STANDARD
2 GANG DP
CLEAN EARTH
13 AMP

1 GANG DP
ROUND PIN
15 AMP

1 GANG
DUAL EARTH
13 AMP

2 GANG
DUAL EARTH
13 AMP

NON STANDARD
2 GANG
CLEAN EARTH
13 AMP

1 GANG
2 AMP

1 GANG
5 AMP

K14246 BSS W K14246 BSS B	K14383 BSS W K14383 BSS B	K14780 BSS W K14780 BSS B	K14781 BSS W K14781 BSS B	K14239 BSS W K14239 BSS B	K14380 BSS W K14380 BSS B	K14381 BSS W K14381 BSS B
K14246 PBR W K14246 PBR B	K14383 PBR W K14383 PBR B	K14780 PBR W K14780 PBR B	K14781 PBR W K14781 PBR B	K14239 PBR W K14239 PBR B	K14380 PBR W K14380 PBR B	K14381 PBR W K14381 PBR B
K14246 SAA W K14246 SAA B	K14383 SAA W K14383 SAA B	K14780 SAA W K14780 SAA B	K14781 SAA W K14781 SAA B	K14239 SAA W K14239 SAA B	K14380 SAA W K14380 SAA B	K14381 SAA W K14381 SAA B
K14246 POC W K14246 POC B	K14383 POC W K14383 POC B	K14780 POC W K14780 POC B	K14781 POC W K14781 POC B	K14239 POC W K14239 POC B	K14380 POC W K14380 POC B	K14381 POC W K14381 POC B
K14246 WHI W	K14383 WHI W	K14780 WHI W	K14781 WHI W	K14239 WHI W	K14380 WHI W	K14381 WHI W
K14246 BLA B	K14383 BLA B	K14780 BLA B	K14781 BLA B	K14239 BLA B	K14380 BLA B	K14381 BLA B
K14246 PBZ B	K14383 PBZ B	K14780 PBZ B	K14781 PBZ B	K14239 PBZ B	K14380 PBZ B	K14381 PBZ B
K14246 ABR B	K14383 ABR B	K14780 ABR B	K14781 ABR B	K14239 ABR B	K14380 ABR B	K14381 ABR B
K14246 GLD W K14246 GLD B	K14383 GLD W K14383 GLD B	K14780 GLD W K14780 GLD B	K14781 GLD W K14781 GLD B	K14239 GLD W K14239 GLD B	K14380 GLD W K14380 GLD B	K14381 GLD W K14381 GLD B
K14246 BBR W K14246 BBR B	K14383 BBR W K14383 BBR B	K14780 BBR W K14780 BBR B	K14781 BBR W K14781 BBR B	K14239 BBR W K14239 BBR B	K14380 BBR W K14380 BBR B	K14381 BBR W K14381 BBR B

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995
(where relevant)

These products are provided with facilities for 'clean earth' connections, and are suitable for non-standard plugs with T shaped earth pins.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.546: 1950

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995
(where relevant)

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995
(where relevant)

These products are provided with facilities for 'clean earth' connections and are suitable for non-standard plugs with 'T' shaped earth pins.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.546: 1950

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS.546: 1950

Dual Earth (see note box)

Dual Earth (see note box)

DECORATIVE

SOCKET
OUTLETS

FLOOR SOCKET 1 GANG
13 AMP






FLOOR SOCKET 2 GANG
13 AMP

GERMAN
2P+E
1 GANG
16 AMP
NON UK

UNIVERSAL
SOCKET
1 GANG
16 AMP
NON UK

AMERICAN
1 GANG
15 AMP
NON UK

AMERICAN
2 GANG
15 AMP
NON UK



MODULAR
Order plate and insert

MODULAR
Order plate and insert

FINISHES

BRUSHED STAINLESS STEEL	STD OPT	K14740 BSS W K14740 BSS B	K14742 BSS W K14742 BSS B	K14092 BSS K4950 WHI K4950 BLK	K14331 BSS K4901 WHI K4901 BLK	K14281 BSS W K14281 BSS B	K14282 BSS W K14282 BSS B
POLISHED BRASS	OPT STD	K14740 PBR W K14740 PBR B	K14742 PBR W K14742 PBR B	K14092 PBR K4950 WHI K4950 BLK	K14331 PBR K4901 WHI K4901 BLK	K14281 PBR W K14281 PBR B	K14282 PBR W K14282 PBR B
SILVER ANODISED ALUMINIUM	STD OPT	K14740 SAA W* K14740 SAA B*	K14742 SAA W* K14742 SAA B*	K14092 SAA K4950 WHI K4950 BLK	K14331 SAA K4901 WHI K4901 BLK	K14281 SAA W K14281 SAA B	K14282 SAA W K14282 SAA B
POLISHED CHROME	OPT STD	K14740 POC W K14740 POC B	K14742 POC W K14742 POC B	K14092 POC K4950 WHI K4950 BLK	K14331 POC K4901 WHI K4901 BLK	K14281 POC W K14281 POC B	K14282 POC W K14282 POC B
WHITE	STD	K14740 WHI W	K14742 WHI W	K14092 WHI K4950 WHI	K14331 WHI K4901 WHI	K14281 WHI W	K14282 WHI W
BLACK ANODISED ALUMINIUM	STD	K14740 BLA B**	K14742 BLA B**	K14092 BLA K4950 BLK	K14331 BLA K4901 BLK	K14281 BLA B	K14282 BLA B
POLISHED BRONZE	STD	K14740 PBZ B	K14742 PBZ B	K14092 PBZ K4950 BLK	K14331 PBZ K4901 BLK	K14281 PBZ B	K14282 PBZ B
ANTIQU BRONZE	STD	K14740 ABR B	K14742 ABR B	K14092 ABR K4950 BLK	K14331 ABR K4901 BLK	K14281 ABR B	K14282 ABR B
GOLD PLATED	OPT SPECIAL ORDER STD	K14740 GLD W K14740 GLD B	K14742 GLD W K14742 GLD B	K14092 GLD K4950 WHI K4950 BLK	K14331 GLD K4901 WHI K4901 BLK	K14281 GLD W K14281 GLD B	K14282 GLD W K14282 GLD B
BRUSHED BRASS	OPT SPECIAL ORDER STD	K14740 BBR W K14740 BBR B	K14742 BBR W K14742 BBR B	K14092 BBR K4950 WHI K4950 BLK	K14331 BBR K4901 WHI K4901 BLK	K14281 BBR W K14281 BBR B	K14282 BBR W K14282 BBR B

- W** White Inserts
- B** Black Inserts
- STD** Standard Black or White
- OPT** Option Black or White

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

*Finish same as BSS—
Cover plate not
aluminium.

**Finish not anodised.

DIMENSIONS:
102 x 86mm

FIXING CENTRES:
60.3mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

*Finish same as BSS—
Cover plate not
aluminium.

**Finish not anodised.

DIMENSIONS:
102 x 146mm

FIXING CENTRES:
120.6mm

BS.1363 Pt. 2: 1995

MOUNTING BOXES

FLUSH 46mm: 877 ZIC
DIMENSIONS: 86 x 86mm

IEC 884-1:1994

This is a modular product.
The front plate (K14902)
and socket (K4950) need to
be ordered separately.
Add appropriate suffix to
the list number.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm
BS.5733: 1995
Grid Plus frontplates,
supplied with mounting
frame. The Universal Socket
does not incorporate an
earth contact. Appliances
needing earth connection
(class 1 equipment) must
NOT be used with this
socket. The socket is
intended for use with BS,
USA and CEE plugs.

MOUNTING BOXES

FLUSH 35mm: 866 ZIC
FLUSH 46mm: 877 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

SSA.444: 1985

MOUNTING BOXES

FLUSH 35mm: 886 ZIC
FLUSH 47mm: 878 ZIC
(for extra wiring space)

DIMENSIONS:
86 x 146mm

FIXING CENTRES:
120.6mm

SSA.444: 1985

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

Also available in German I6A 2P+E version

SHAVER SUPPLY UNITS

DUAL VOLTAGE	DUAL VOLTAGE
115/230V	115/230V
OUTPUT	OUTPUT
220/240V	120/130V
50/60HZ INPUT	50/60HZ INPUT
	NON UK

K14709 BSS W K14709 BSS B	K14710 BSS W K14710 BSS B
K14709 PBR W K14709 PBR B	K14710 PBR W K14710 PBR B
K14709 SAA W K14709 SAA B	K14710 SAA W K14710 SAA B
K14709 POC W K14709 POC B	K14710 POC W K14710 POC B
K14709 WHI W	K14710 WHI W
K14709 BLA B	K14710 BLA B
K14709 PBZ B	K14710 PBZ B
K14709 ABR B	K14710 ABR B
K14709 GLD W K14709 GLD B	K14710 GLD W K14710 GLD B
K14709 BBR W K14709 BBR B	K14710 BBR W K14710 BBR B



MOUNTING BOXES

FLUSH: 878 ZIC

This design incorporates a double wound isolating transformer rated 20VA at 230 or 115 volts and meets BS.3535: 1996 making it safe for use in bathrooms.

Insertion of a shaver plug automatically switches on by energising the primary side of the isolating transformer – removal automatically switches off. The transformer is protected against overload by an automatic solid state overload device with automatic resetting.

Front plate 7mm thick to allow fixing to 47mm deep box.

DIMENSIONS: 146 x 86mm

FIXING CENTRES: 120.6mm

BS.3535: 1996

DECORATIVE

CONNECTION
UNITS
SWITCHED

CONNECTION
UNITS
UNSWITCHED

DP
13 AMP





DP
WITH NEON
13 AMP

DP
WITH FLEX
OUTLET
13 AMP

DP
WITH NEON &
FLEX OUTLET
13 AMP

13 AMP

WITH NEON
13 AMP



FINISHES

BRUSHED STAINLESS STEEL	STD	K14941 BSS W	K14961 BSS W	K14931 BSS W	K14971 BSS W	K14948 BSS W	K14958 BSS W
	OPT	K14941 BSS B	K14961 BSS B	K14931 BSS B	K14971 BSS B	K14948 BSS B	K14958 BSS B
POLISHED BRASS	OPT	K14941 PBR W	K14961 PBR W	K14931 PBR W	K14971 PBR W	K14948 PBR W	K14958 PBR W
	STD	K14941 PBR B	K14961 PBR B	K14931 PBR B	K14971 PBR B	K14948 PBR B	K14958 PBR B
SILVER ANODISED ALUMINIUM	STD	K14941 SAA W	K14961 SAA W	K14931 SAA W	K14971 SAA W	K14948 SAA W	K14958 SAA W
	OPT	K14941 SAA B	K14961 SAA B	K14931 SAA B	K14971 SAA B	K14948 SAA B	K14958 SAA B
POLISHED CHROME	OPT	K14941 POC W	K14961 POC W	K14931 POC W	K14971 POC W	K14948 POC W	K14958 POC W
	STD	K14941 POC B	K14961 POC B	K14931 POC B	K14971 POC B	K14948 POC B	K14958 POC B
WHITE	STD	K14941 WHI W	K14961 WHI W	K14931 WHI W	K14971 WHI W	K14948 WHI W	K14958 WHI W
BLACK ANODISED ALUMINIUM	STD	K14941 BLA B	K14961 BLA B	K14931 BLA B	K14971 BLA B	K14948 BLA B	K14958 BLA B
POLISHED BRONZE	STD	K14941 PBZ B	K14961 PBZ B	K14931 PBZ B	K14971 PBZ B	K14948 PBZ B	K14958 PBZ B
ANTIQUÉ BRONZE	STD	K14941 ABR B	K14961 ABR B	K14931 ABR B	K14971 ABR B	K14948 ABR B	K14958 ABR B
GOLD PLATED	OPT	K14941 GLD W	K14961 GLD W	K14931 GLD W	K14971 GLD W	K14948 GLD W	K14958 GLD W
	SPECIAL ORDER STD	K14941 GLD B	K14961 GLD B	K14931 GLD B	K14971 GLD B	K14948 GLD B	K14958 GLD B
BRUSHED BRASS	OPT	K14941 BBR W	K14961 BBR W	K14931 BBR W	K14971 BBR W	K14948 BBR W	K14958 BBR W
	SPECIAL ORDER STD	K14941 BBR B	K14961 BBR B	K14931 BBR B	K14971 BBR B	K14948 BBR B	K14958 BBR B

W White Inserts

B Black Inserts

STD Standard Black or

STD White

OPT Option Black or

OPT White

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS. 1363 Pt. 4: 1995

Neon is only available in white or black rocker.

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS. 1363 Pt. 4: 1995

Neon is only available in white or black rocker.

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS. 1363 Pt. 4: 1995

MOUNTING BOXES

FLUSH: 877 ZIC

All connection units are fitted with a 13amp fuse (to BS1362)

TERMINAL CAPACITY
2 x 6mm² stranded (max)

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS. 1363 Pt. 4: 1995

LEAD TIMES

4 weeks: BSS, PBR, SAA

6 weeks: POC, WHI, BLA, PBZ, BBR

8 weeks: ABR

Special Order: GLD

Lead time on application

SWITCHES

COOKER SWITCHES

3 POLE FAN ISOLATOR

WITH FLEX
OUTLET
13 AMP

WITH NEON &
FLEX OUTLET
13 AMP

1 GANG SP
2 WAY
20 AMP

2 GANG SP
2 WAY
20 AMP

1 GANG DP
WITH NEON
32 AMP

1 GANG DP
WITH NEON
45 AMP

45 AMP DP
MAIN SWITCH
AND 13 AMP
SWITCH SOCKET
OUTLET WITH
NEONS

K14989 BSS W K14989 BSS B	K14978 BSS W K14978 BSS B	K14371 BSS W K14371 BSS B	K14372 BSS W K14372 BSS B	K14305 BSS W K14305 BSS B	K14336 BSS W K14336 BSS B	K14361 BSS W K14361 BSS B	K14859 BSS W K14859 BSS B
K14989 PBR W K14989 PBR B	K14978 PBR W K14978 PBR B	K14371 PBR W K14371 PBR B	K14372 PBR W K14372 PBR B	K14305 PBR W K14305 PBR B	K14336 PBR W K14336 PBR B	K14361 PBR W K14361 PBR B	K14859 PBR W K14859 PBR B
K14989 SAA W K14989 SAA B	K14978 SAA W K14978 SAA B	K14371 SAA W K14371 SAA B	K14372 SAA W K14372 SAA B	K14305 SAA W K14305 SAA B	K14336 SAA W K14336 SAA B	K14361 SAA W K14361 SAA B	K14859 SAA W K14859 SAA B
K14989 POC W K14989 POC B	K14978 POC W K14978 POC B	K14371 POC W K14371 POC B	K14372 POC W K14372 POC B	K14305 POC W K14305 POC B	K14336 POC W K14336 POC B	K14361 POC W K14361 POC B	K14859 POC W K14859 POC B
K14989 WHI W	K14978 WHI W	K14371 WHI W	K14372 WHI W	K14305 WHI W	K14336 WHI W	K14361 WHI W	K14859 WHI W
K14989 BLA B	K14978 BLA B	K14371 BLA B	K14372 BLA B	K14305 BLA B	K14336 BLA B	K14361 BLA B	K14859 BLA B
K14989 PBZ B	K14978 PBZ B	K14371 PBZ B	K14372 PBZ B	K14305 PBZ B	K14336 PBZ B	K14361 PBZ B	K14859 PBZ B
K14989 ABR B	K14978 ABR B	K14371 ABR B	K14372 ABR B	K14305 ABR B	K14336 ABR B	K14361 ABR B	K14859 ABR B
K14989 GLD W K14989 GLD B	K14978 GLD W K14978 GLD B	K14371 GLD W K14371 GLD B	K14372 GLD W K14372 GLD B	K14305 GLD W K14305 GLD B	K14336 GLD W K14336 GLD B	K14361 GLD W K14361 GLD B	K14859 GLD W K14859 GLD B
K14989 BBR W K14989 BBR B	K14978 BBR W K14978 BBR B	K14371 BBR W K14371 BBR B	K14372 BBR W K14372 BBR B	K14305 BBR W K14305 BBR B	K14336 BBR W K14336 BBR B	K14361 BBR W K14361 BBR B	K14859 BBR W K14859 BBR B

MOUNTING BOXES
FLUSH: 877 ZIC
All connection units are fitted with a 13amp fuse (to BS1362)
TERMINAL CAPACITY 2 x 6mm² stranded (max)
DIMENSIONS: 86 x 86mm
FIXING CENTRES: 60.3mm
BS. 1363 Pt. 4: 1995

MOUNTING BOXES
FLUSH: 877 ZIC
All connection units are fitted with a 13amp fuse (to BS1362)
TERMINAL CAPACITY 2 x 6mm² stranded (max)
DIMENSIONS: 86 x 86mm
FIXING CENTRES: 60.3mm
BS. 1363 Pt. 4: 1995

MOUNTING BOXES
FLUSH 877 ZIC
TERMINAL CAPACITY 2 x 6mm² Stranded (max)
DIMENSIONS: 86 x 86mm
FIXING CENTRES: 60.3mm
BS.3676 Pt. 1: 1989
These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES
FLUSH 866 ZIC
TERMINAL CAPACITY 2 x 6mm² Stranded (max)
DIMENSIONS: 86 x 86mm
FIXING CENTRES: 60.3mm
BS.3676 Pt. 1: 1989
These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES
FLUSH 866 ZIC
DIMENSIONS: 86 x 86mm
FIXING CENTRES: 60.3mm
BS.3676 Pt. 1: 1989
These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES
FLUSH 878 ZIC
DIMENSIONS: 86 x 146mm
FIXING CENTRES: 120.6mm
BS.3676 Pt. 1: 1989
These switches do not have to be derated when used with fluorescent or inductive loads

MOUNTING BOXES
FLUSH 45 AMP DP MAIN SWITCH AND 13 AMP SWITCH SOCKET OUTLET WITH NEONS (Up to 10mm² conductor)
DIMENSIONS: 86 x 146mm
FIXING CENTRES: 120.6mm
BS.4177: 1992
When using 10mm cable, the box must be installed 6mm to 10mm sub flush to the wall surface

MOUNTING BOXES
FLUSH 877 ZIC
DIMENSIONS: 86 x 186mm
FIXING CENTRES: 60.3mm
BS.EN 60947-3:1992
Mounting box must be installed 6mm to 10mm sub flush to the wall surface

DECORATIVE

GRID PLUS MODULAR FRONTPLATES

SUPPLIED WITH GRIDS

1 MODULE







2 MODULE

3 MODULE

4 MODULE

6 MODULE

8 MODULE



FINISHES

BRUSHED STAINLESS STEEL

K14331 BSS

K14332 BSS

K14333 BSS

K14334 BSS

K14346 BSS

K14348 BSS

POLISHED BRASS

K14331 PBR

K14332 PBR

K14333 PBR

K14334 PBR

K14346 PBR

K14348 PBR

SILVER ANODISED ALUMINIUM

K14331 SAA

K14332 SAA

K14333 SAA

K14334 SAA

K14346 SAA

K14348 SAA

POLISHED CHROME

K14331 POC

K14332 POC

K14333 POC

K14334 POC

K14346 POC

K14348 POC

WHITE

K14331 WHI

K14332 WHI

K14333 WHI

K14334 WHI

K14346 WHI

K14348 WHI

BLACK ANODISED ALUMINIUM

K14331 BLA

K14332 BLA

K14333 BLA

K14334 BLA

K14346 BLA

K14348 BLA

POLISHED BRONZE

K14331 PBZ

K14332 PBZ

K14333 PBZ

K14334 PBZ

K14346 PBZ

K14348 PBZ

ANTIQUÉ BRONZE

K14331 ABR

K14332 ABR

K14333 ABR

K14334 ABR

K14346 ABR

K14348 ABR

GOLD PLATED

SPECIAL ORDER

K14331 GLD

K14332 GLD

K14333 GLD

K14334 GLD

K14346 GLD

K14348 GLD

BRUSHED BRASS

SPECIAL ORDER

K14331 BBR

K14332 BBR

K14333 BBR

K14334 BBR

K14346 BBR

K14348 BBR

MOUNTING BOX

FLUSH:
891 ALM

DIMENSIONS:
86 x 86mm

MOUNTING BOX

FLUSH:
891 ALM

DIMENSIONS:
86 x 86mm

MOUNTING BOX

FLUSH:
892 ALM

DIMENSIONS:
86 x 146mm

MOUNTING BOX

FLUSH:
892 ALM

DIMENSIONS:
86 x 146mm

MOUNTING BOX

FLUSH:
893 ALM

DIMENSIONS:
146 x 146mm

MOUNTING BOX

FLUSH:
893 ALM

DIMENSIONS:
146 x 146mm

LEAD TIMES

4 weeks: BSS, PBR, SAA

6 weeks: POC, WHI, BLA PBZ, BBR






8 weeks: ABR

Special Order: GLD

Lead time on application

TRIPLE POLE & NEUTRAL SWITCH

9 MODULE 12 MODULE 18 MODULE 24 MODULE 1 MODULE ARCHITRAVE 2 MODULE ARCHITRAVE



K14349 BSS	K14352 BSS	K14358 BSS	K14354 BSS	K14401 BSS	K14402 BSS	K14114 BSS
K14349 PBR	K14352 PBR	K14358 PBR	K14354 PBR	K14401 PBR	K14402 PBR	K14114 PBR
K14349 SAA	K14352 SAA	K14358 SAA	K14354 SAA	K14401 SAA	K14402 SAA	K14114 SAA
K14349 POC	K14352 POC	K14358 POC	K14354 POC	K14401 POC	K14402 POC	K14114 POC
K14349 WHI	K14352 WHI	K14358 WHI	K14354 WHI	K14401 WHI	K14402 WHI	K14114 WHI
K14349 BLA	K14352 BLA	K14358 BLA	K14354 BLA	K14401 BLA	K14402 BLA	K14114 BLA
K14349 PBZ	K14352 PBZ	K14358 PBZ	K14354 PBZ	K14401 PBZ	K14402 PBZ	K14114 PBZ
K14349 ABR	K14352 ABR	K14358 ABR	K14354 ABR	K14401 ABR	K14402 ABR	K14114 ABR
K14349 GLD	K14352 GLD	K14358 GLD	K14354 GLD	K14401 GLD	K14402 GLD	K14114 GLD
K14349 BBR	K14352 BBR	K14358 BBR	K14354 BBR	K14401 BBR	K14402 BBR	K14114 BBR

MOUNTING BOX

FLUSH:
895 ALM

DIMENSIONS:
207 x 146mm

MOUNTING BOX

FLUSH:
895 ALM

DIMENSIONS:
207 x 146mm

MOUNTING BOX

FLUSH:
898 ALM

DIMENSIONS:
207 x 207mm

MOUNTING BOX

FLUSH:
900 ALM

DIMENSIONS:
267 x 207mm

MOUNTING BOX

FLUSH:
3891 ZIC

MOUNTING FRAME
K14801

MOUNTING BOX

FLUSH:
3892 ZIC

MOUNTING FRAME
K14802

MOUNTING BOXES

FLUSH
5268 ALM
(Mounting box should
be mounted 6 to
10mm sub-flush to the
wall)

DIMENSIONS:
203 x 140mm

TERMINAL CAPACITY:
16mm² conductors

BS.EN 60947-3:1992

DECORATIVE

TOGGLE SWITCH
FRONTPLATES

SUPPLIED WITH GRIDS

1 MODULE

2 MODULE





3 MODULE

4 MODULE

TOGGLE SWITCH
MODULES

20 AMP
SP 1 WAY

20 AMP
SP 2 WAY



FINISHES

BRUSHED STAINLESS STEEL	K14431 BSS	K14432 BSS	K14433 BSS	K14434 BSS	K14891 BSS	K14892 BSS
POLISHED BRASS	K14431 PBR	K14432 PBR	K14433 PBR	K14434 PBR	K14891 PBR	K14892 PBR
SILVER ANODISED ALUMINIUM	K14431 SAA	K14432 SAA	K14433 SAA	K14434 SAA	K14891 SAA	K14892 SAA
POLISHED CHROME	K14431 POC	K14432 POC	K14433 POC	K14434 POC	K14891 POC	K14892 POC
WHITE	K14431 WHI	K14432 WHI	K14433 WHI	K14434 WHI	K14891 WHI	K14892 WHI
BLACK ANODISED ALUMINIUM	K14431 BLA	K14432 BLA	K14433 BLA	K14434 BLA	K14891 BLA	K14892 BLA
POLISHED BRONZE	K14431 PBZ	K14432 PBZ	K14433 PBZ	K14434 PBZ	K14891 PBZ	K14892 PBZ
ANTIQUÉ BRONZE	K14431 ABR	K14432 ABR	K14433 ABR	K14434 ABR	K14891 ABR	K14892 ABR
GOLD PLATED SPECIAL ORDER	K14431 GLD	K14432 GLD	K14433 GLD	K14434 GLD	K14891 GLD	K14892 GLD
BRUSHED BRASS SPECIAL ORDER	K14431 BBR	K14432 BBR	K14433 BBR	K14434 BBR	K14891 BBR	K14892 BBR

MOUNTING BOX
FLUSH:
891 ALM
DIMENSIONS:
86 x 86mm
BS.3676 Pt.1:1989

MOUNTING BOX
FLUSH:
891 ALM
DIMENSIONS:
86 x 86mm
BS.3676 Pt.1:1989

MOUNTING BOX
FLUSH:
892 ALM
DIMENSIONS:
86 x 146mm
BS.3676 Pt.1:1989

MOUNTING BOX
FLUSH:
892 ALM
DIMENSIONS:
86 x 146mm
BS.3676 Pt.1:1989

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS.3676 Pt.1:1989

These switches do NOT have to be derated when used with fluorescent and inductive loads.
BS.3676 Pt.1:1989

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA, PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

20 AMP
DP 1 WAY

20 AMP
INTERMEDIATE



K14896 BSS	K14893 BSS
K14896 PBR	K14893 PBR
K14896 SAA	K14893 SAA
K14896 POC	K14893 POC
K14896 WHI	K14893 WHI
K14896 BLA	K14893 BLA
K14896 PBZ	K14893 PBZ
K14896 ABR	K14893 ABR
K14896 GLD	K14893 GLD
K14896 BBR	K14893 BBR



These switches do NOT have to be derated when used with fluorescent and inductive loads.

BS.3676 Pt.1:1989

These switches do NOT have to be derated when used with fluorescent and inductive loads.

BS.3676 Pt.1:1989

DECORATIVE

SWITCH
MODULES
10 AMP

10 AMP
SP 1 WAY


10 AMP
SP 2 WAY

10 AMP
SP 2 WAY
PUSH SWITCH

10 AMP
SP 2 WAY
RED ROCKER
PUSH SWITCH

10 AMP
SP 2 WAY
BELL
PUSH SWITCH

10 AMP
SP 2 WAY
PRESS
PUSH SWITCH



FINISHES

BRUSHED STAINLESS STEEL	<input type="checkbox"/> STD <input type="checkbox"/> OPT	K4881 BSS W K4881 BSS B	K4882 BSS W K4882 BSS B	K4885 BSS W K4885 BSS B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK
POLISHED BRASS	<input type="checkbox"/> OPT <input type="checkbox"/> STD	K4881 PBR W K4881 PBR B	K4882 PBR W K4882 PBR B	K4885 PBR W K4885 PBR B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK
SILVER ANODISED ALUMINIUM	<input type="checkbox"/> STD <input type="checkbox"/> OPT	K4881 SAA W K4881 SAA B	K4882 SAA W K4882 SAA B	K4885 SAA W K4885 SAA B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK
POLISHED CHROME	<input type="checkbox"/> OPT <input type="checkbox"/> STD	K4881 POC W K4881 POC B	K4882 POC W K4882 POC B	K4885 POC W K4885 POC B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK
WHITE	<input type="checkbox"/> STD	K4881 WHI	K4882 WHI	K4885 WHI	K4885 RED	K4885 B WHI	K4885 P WHI
BLACK ANODISED ALUMINIUM	<input type="checkbox"/> STD	K4881 BLK	K4882 BLK	K4885 BLK	K4885 RED B	K4885 B BLK	K4885 P BLK
POLISHED BRONZE	<input type="checkbox"/> STD	K4881 PBZ B	K4882 PBZ B	K4885 PBZ B	K4885 RED B	K4885 B BLK	K4885 P BLK
ANTIQU BRONZE	<input type="checkbox"/> STD	K4881 ABR B	K4882 ABR B	K4885 ABR B	K4885 RED B	K4885 B BLK	K4885 P BLK
GOLD PLATED	<input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4881 GLD W K4881 GLD B	K4882 GLD W K4882 GLD B	K4885 GLD W K4885 GLD B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK
BRUSHED BRASS	<input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4881 BBR W K4881 BBR B	K4882 BBR W K4882 BBR B	K4885 BBR W K4885 BBR B	K4885 RED K4885 RED B	K4885 B WHI K4885 B BLK	K4885 P WHI K4885 P BLK

- W** White Inserts
- B** Black Inserts
- STD** Standard Black or
- STD** White
- OPT** Option Black or
- OPT** White

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

SWITCH MODULES 20 AMP

10 AMP
DP 1 WAY

10 AMP
RETRACTIVE


20 AMP
SP 1 WAY

20 AMP
SP 1 WAY
WITH
WINDOW

20 AMP
SP 2 WAY

20 AMP
SP 2 WAY
WITH
WINDOW

20 AMP
SP 2 WAY
RED
ROCKER



K4981 BSS W K4981 BSS B	K4900 BSS W K4900 BSS B	K4891 BSS W K4891 BSS B	K4891 W WHI K4891 W BLK	K4892 BSS W K4892 BSS B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 PBR W K4981 PBR B	K4900 PBR W K4900 PBR B	K4891 PBR W K4891 PBR B	K4891 W WHI K4891 W BLK	K4892 PBR W K4892 PBR B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 SAA W K4981 SAA B	K4900 SAA W K4900 SAA B	K4891 SAA W K4891 SAA B	K4891 W WHI K4891 W BLK	K4892 SAA W K4892 SAA B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 POC W K4981 POC B	K4900 POC W K4900 POC B	K4891 POC W K4891 POC B	K4891 W WHI K4891 W BLK	K4892 POC W K4892 POC B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 WHI	K4900 WHI	K4891 WHI	K4891 W WHI	K4892 WHI	K4892 W WHI	K4892 RED
K4981 WHI	K4900 BLK	K4891 BLK	K4891 W BLK	K4892 BLK	K4892 W BLK	K4892 RED B
K4981 PBZ B	K4900 PBZ B	K4891 PBZ B	K4891 W BLK	K4892 PBZ B	K4892 W BLK	K4892 RED B
K4981 ABR B	K4900 ABR B	K4891 ABR B	K4891 W BLK	K4892 ABR B	K4892 W BLK	K4892 RED B
K4981 GLD W K4981 GLD B	K4900 GLD W K4900 GLD B	K4891 GLD W K4891 GLD B	K4891 W WHI K4891 W BLK	K4892 GLD W K4892 GLD B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B
K4981 BBR W K4981 BBR B	K4900 BBR W K4900 BBR B	K4891 BBR W K4891 BBR B	K4891 W WHI K4891 W BLK	K4892 BBR W K4892 BBR B	K4892 W WHI K4892 W BLK	K4892 RED K4892 RED B

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

DECORATIVE

SWITCH
MODULES
20 AMP

SP
2 WAY
WITH NEON
LOCATOR



DP
1 WAY

DP
1 WAY
WITH TEXT

DP
1 WAY
WITH NEON

DP
1 WAY
WITH NEON
AND TEXT

DP
1 WAY
WITH
WINDOW



FINISHES

BRUSHED STAINLESS STEEL	<input type="checkbox"/> STD <input type="checkbox"/> OPT	K4892 L WHI K4892 L BLK	K4896 BSS W K4896 BSS B	BOILER K4896 BR WHI K4896 BR BLK	K4896 N WHI K4896 N BLK	BOILER K4896N BR WHI K4896N BR BLK	K4896 W WHI K4896 W BLK
POLISHED BRASS	<input type="checkbox"/> OPT <input type="checkbox"/> STD	K4892 L WHI K4892 L BLK	K4896 PBR W K4896 PBR B	DISHWASHER K4896 DW WHI K4896 DW BLK	K4896 N WHI K4896 N BLK	DISHWASHER K4896N DW WHI K4896N DW BLK	K4896 W WHI K4896 W BLK
SILVER ANODISED ALUMINIUM	<input type="checkbox"/> STD <input type="checkbox"/> OPT	K4892 L WHI K4892 L BLK	K4896 SAA W K4896 SAA B	COOKER HOOD K4896 CH WHI K4896 CH BLK	K4896 N WHI K4896 N BLK	COOKER HOOD K4896N CH WHI K4896N CH BLK	K4896 W WHI K4896 W BLK
POLISHED CHROME	<input type="checkbox"/> OPT <input type="checkbox"/> STD	K4892 L WHI K4892 L BLK	K4896 POC W K4896 POC B	FAN K4896 FN WHI K4896 FN BLK	K4896 N WHI K4896 N BLK	FAN K4896N FN WHI K4896N FN BLK	K4896 W WHI K4896 W BLK
WHITE	<input type="checkbox"/> STD	K4892 L WHI	K4896 WHI W	FRIDGE K4896 FG WHI K4896 FG BLK	K4896 N WHI	FRIDGE K4896N FG WHI K4896N FG BLK	K4896 W WHI
BLACK ANODISED ALUMINIUM	<input type="checkbox"/> STD	K4892 L BLK	K4896 BLA B	FREEZER K4896 FZ WHI K4896 FZ BLK	K4896 N BLK	FREEZER K4896N FZ WHI K4896N FZ BLK	K4896 W WHI
POLISHED BRONZE	<input type="checkbox"/> STD	K4892 L BLK	K4896 PBZ B	WASTE DISPOSAL K4896 WD WHI K4896 WD BLK	K4896 N BLK	WASTE DISPOSAL K4896N WD WHI K4896N WD BLK	K4896 W BLK
ANTIQUÉ BRONZE	<input type="checkbox"/> STD	K4892 L BLK	K4896 ABR B	WASHING MACHINE K4896 WM WHI K4896 WM BLK	K4896 N BLK	WASHING MACHINE K4896N WM WHI K4896N WM BLK	K4896 W BLK
GOLD PLATED	<input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4892 L WHI K4892 L BLK	K4896 GLD W K4896 GLD B	TUMBLE DRYER K4896 TD WHI K4896 TD BLK	K4896 N BLK	TUMBLE DRYER K4896N TD WHI K4896N TD BLK	K4896 W BLK
BRUSHED BRASS	<input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4892 L WHI K4892 L BLK	K4896 BBR W K4896 BBR B	MICROWAVE K4896 MW WHI K4896 MW BLK	K4896 N WHI K4896 N BLK	MICROWAVE K4896N MW WHI K4896N MW BLK	K4896 W WHI K4896 W BLK
	<input type="checkbox"/> OPT <input type="checkbox"/> STD	K4892 L WHI K4892 L BLK	K4896 BBR W K4896 BBR B	HEATER K4896 HR WHI K4896 HR BLK	K4896 N WHI K4896 N BLK	HEATER K4896N HR WHI K4896N HR BLK	K4896 W WHI K4896 W BLK
				OVEN K4896 OV WHI K4896 OV BLK		OVEN K4896N OV WHI K4896N OV BLK	

- W** White Inserts
- B** Black Inserts
- STD **Standard Black or**
- STD **White**
- OPT Option Black or
- OPT White

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.


BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.

BS.3676 Pt.1: 1989

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

DP 1 WAY RED ROCKER	INTERMEDIATE	INTERMEDIATE RED ROCKER	SP 2 WAY & CENTRE OFF	SP 2 WAY & CENTRE OFF RED ROCKER	DP 1 WAY PUSH MAKE	DP 1 WAY PUSH MAKE RED ROCKER
---------------------------	--------------	----------------------------	-----------------------------	---	--------------------------	--



K4896 RED K4896 RED B	K4893 BSS W K4893 BSS B	K4893 RED K4893 RED B	K4899 BSS W K4899 BSS B	K4899 RED K4893 RED B	K4910 BSS W K4910 BSS B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 PBR W K4893 PBR B	K4893 RED K4893 RED B	K4899 PBR W K4899 PBR B	K4899 RED K4899 RED B	K4910 PBR W K4910 PBR B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 SAA W K4893 SAA B	K4893 RED K4893 RED B	K4899 SAA W K4899 SAA B	K4899 RED K4899 RED B	K4910 SAA W K4910 SAA B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 POC W K4893 POC B	K4893 RED K4893 RED B	K4899 POC W K4899 POC B	K4899 RED K4899 RED B	K4910 POC W K4910 POC B	K4910 RED K4910 RED B
K4896 RED	K4893 WHI W	K4893 RED	K4899 WHI W	K4899 RED	K4910 WHI W	K4910 RED
K4896 RED B	K4893 BLA B	K4893 RED B	K4899 BLA B	K4899 RED B	K4910 BLA B	K4910 RED B
K4896 RED B	K4893 PBZ B	K4893 RED B	K4899 PBZ B	K4899 RED B	K4910 PBZ B	K4910 RED B
K4896 RED B	K4893 ABR B	K4893 RED B	K4899 ABR B	K4899 RED B	K4910 ABR B	K4910 RED B
K4896 RED K4896 RED B	K4893 GLD W K4893 GLD B	K4893 RED K4893 RED B	K4899 GLD W K4899 GLD B	K4899 RED K4899 RED B	K4910 GLD W K4910 GLD B	K4910 RED K4910 RED B
K4896 RED K4896 RED B	K4893 BBR W K4893 BBR B	K4893 RED K4893 RED B	K4899 BBR W K4899 BBR B	K4899 RED K4899 RED B	K4910 BBR W K4910 BBR B	K4910 RED K4910 RED B

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with fluorescent or inductive loads.
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with inductive loads.
Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with inductive loads.
Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

DECORATIVE

SWITCH
MODULES
20 AMP

DP
1 WAY
PUSH BREAK

DP
1 WAY
PUSH BREAK

DP
1 WAY
PUSH BREAK
RED ROCKER

KEY
SWITCH
MODULE

SP
KEY SWITCH
2 WAY
MARKED
'EMG LTG'

SP
KEY SWITCH
2 WAY

DP
KEY SWITCH
1 WAY

INTERMEDIATE
KEY SWITCH



FINISHES

BRUSHED STAINLESS STEEL	<input type="checkbox"/> STD <input type="checkbox"/> OPT	K4915 BSS W K4915 BSS B	K4915 RED K4915 RED B	K4898 WHI K4898 BLK	K4898 EL WHI K4898 EL BLK	K4917 WHI K4917 BLK	K4894 WHI K4894 BLK
POLISHED BRASS	<input type="checkbox"/> OPT <input type="checkbox"/> STD	K4915 PBR W K4915 PBR B	K4915 RED K4915 RED B	K4898 WHI K4898 BLK	K4898 EL WHI K4898 EL BLK	K4917 WHI K4917 BLK	K4894 WHI K4894 BLK
SILVER ANODISED ALUMINIUM	<input type="checkbox"/> STD <input type="checkbox"/> OPT	K4915 SAA W K4915 SAA B	K4915 RED K4915 RED B	K4898 WHI K4898 BLK	K4898 EL WHI K4898 EL BLK	K4917 WHI K4917 BLK	K4894 WHI K4894 BLK
POLISHED CHROME	<input type="checkbox"/> OPT <input type="checkbox"/> STD	K4915 POC W K4915 POC B	K4915 RED K4915 RED B	K4898 WHI K4898 BLK	K4898 EL WHI K4898 EL BLK	K4917 WHI K4917 BLK	K4894 WHI K4894 BLK
WHITE	<input type="checkbox"/> STD	K4915 WHI W	K4915 RED	K4898 WHI	K4898 EL WHI	K4917 WHI	K4894 WHI
BLACK ANODISED ALUMINIUM	<input type="checkbox"/> STD	K4915 BLA B	K4915 RED B	K4898 BLK	K4898 EL BLK	K4917 BLK	K4894 BLK
POLISHED BRONZE	<input type="checkbox"/> STD	K4915 PBZ B	K4915 RED B	K4898 BLK	K4898 EL BLK	K4917 BLK	K4894 BLK
ANTIQU BRONZE	<input type="checkbox"/> STD	K4915 ABR B	K4915 RED B	K4898 BLK	K4898 EL BLK	K4917 BLK	K4894 BLK
GOLD PLATED	<input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4915 GLD W K4915 GLD B	K4915 RED K4915 RED B	K4898 WHI K4898 BLK	K4898 EL WHI K4898 EL BLK	K4917 WHI K4917 BLK	K4894 WHI K4894 BLK
BRUSHED BRASS	<input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4915 BBR W K4915 BBR B	K4915 RED K4915 RED B	K4898 WHI K4898 BLK	K4898 EL WHI K4898 EL BLK	K4917 WHI K4917 BLK	K4894 WHI K4894 BLK

- W** White Inserts
- B** Black Inserts
- STD** Standard Black or
- STD** White
- OPT** Option Black or
- OPT** White

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

These switches do NOT have to be derated when used with inductive loads.

Note: Push switches are not designed for fluorescent loads
BS.3676 Pt.1: 1989

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied

BS.3676 Pt.1: 1989
Key (3405 NIP) is supplied

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

INDICATOR MODULES

SP
KEY SWITCH
2 WAY BIASED
ONE WAY

200-250 VOLT
RED

200-250 VOLT
GREEN

200-250 VOLT
AMBER

21-36 VOLT
RED

21-36 VOLT
GREEN

21-36 VOLT
AMBER



K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI	K4889 RED	K4889 GRN	K4889 AMB	K4836 RED	K4836 GRN	K4836 AMB
K4918 BLK	K4889 RED B	K4889 GRN B	K4889 AMB B	K4836 RED B	K4836 GRN B	K4836 AMB B
K4918 BLK	K4889 RED B	K4889 GRN B	K4889 AMB B	K4836 RED B	K4836 GRN B	K4836 AMB B
K4918 BLK	K4889 RED B	K4889 GRN B	K4889 AMB B	K4836 RED B	K4836 GRN B	K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B
K4918 WHI K4918 BLK	K4889 RED K4889 RED B	K4889 GRN K4889 GRN B	K4889 AMB K4889 AMB B	K4836 RED K4836 RED B	K4836 GRN K4836 GRN B	K4836 AMB K4836 AMB B

BS.3676 Pt.1: 1989

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

BS.5733: 1995

Key (3405 NP)
is supplied

DECORATIVE

DIMMER SWITCH MODULES

1 GANG 220W/180VA 230Va.c. TWO WAY 1 MODULE	1 GANG 400W/320VA 50Hz TWO WAY 2 MODULE
---	---

ACCESSORY MODULES

TV CO-AXIAL OUTLET NON-ISOLATED	TV CO-AXIAL OUTLET ISOLATED	16 AMP CORD OUTLET	13 AMP FUSE UNIT
---------------------------------------	-----------------------------------	-----------------------	---------------------



FINISHES

BRUSHED STAINLESS STEEL <input type="checkbox"/> STD <input type="checkbox"/> OPT	K4501 BSS WLW K4501 BSS BLV	K4500 BSS WLW K4500 BSS BLV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
POLISHED BRASS <input type="checkbox"/> OPT <input type="checkbox"/> STD	K4501 PBR WLW K4501 PBR BLV	K4500 PBR WLW K4500 PBR BLV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
SILVER ANODISED ALUMINIUM <input type="checkbox"/> STD <input type="checkbox"/> OPT	K4501 SAA WLW K4501 SAA BLV	K4500 SAA WLW K4500 SAA BLV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
POLISHED CHROME <input type="checkbox"/> OPT <input type="checkbox"/> STD	K4501 POC WLW K4501 POC BLV	K4500 POC WLW K4500 POC BLV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
WHITE <input type="checkbox"/> STD	K4501 WHI WLW	K4500 WHI WLW	K4520 WHI	K4521 WHI	K4886 WHI	K4890 WHI
BLACK ANODISED ALUMINIUM <input type="checkbox"/> STD	K4501 BLA BLV	K4500 BLA BLV	K4520 BLK	K4521 BLK	K4886 BLK	K4890 BLK
POLISHED BRONZE <input type="checkbox"/> STD	K4501 PBZ BLV	K4500 PBZ BLV	K4520 BLK	K4521 BLK	K4886 BLK	K4890 BLK
ANTIQU BRONZE <input type="checkbox"/> STD	K4501 ABR BLV	K4500 ABR BLV	K4520 BLK	K4521 BLK	K4886 BLK	K4890 BLK
GOLD PLATED <input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4501 GLD WLW K4501 GLD BLV	K4500 GLD WLW K4500 GLD BLV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK
BRUSHED BRASS <input type="checkbox"/> OPT SPECIAL ORDER <input type="checkbox"/> STD	K4501 BBR WLW K4501 BBR BLV	K4500 BBR WLW K4500 BBR BLV	K4520 WHI K4520 BLK	K4521 WHI K4521 BLK	K4886 WHI K4886 BLK	K4890 WHI K4890 BLK

- W** White Inserts
- B** Black Inserts
- STD **Standard Black or**
- STD **White**
- OPT Option Black or
- OPT White

These dimmers incorporate the latest in micro-controller based circuitry to provide electronic soft-start and overload protection. They are radio frequency interference suppressed to BS EN 55015

Suitable for use with tungsten filament lamps and for low voltage halogen lamps via good quality, electronic or wire-wound transformers.

They are not suitable for fluorescent lamps.

Note: Refer to MK Technical Services Department for derating factors when more than one unit is used in any one box.

Conforms to the latest standard BS EN 60669-2-1

For direct connection to TV or FM aerial co-axial downlead.

Not to be used in same enclosure as mains exceeding 50V.

For direct connection to TV or FM aerial co-axial downlead.

Not to be used in same enclosure as mains exceeding 50V.

Provides safety isolation rated at 2kV between aerial lead and socket.

Complete with 3 pairs of terminals. The supply terminals are suitable for up to 2 x 2.5mm² or 1 x 4mm² solid conductors. The load terminals are suitable for one 1.5mm² flexible cord.

A cord grip is also fitted.

Fuse carrier comes with 13amp cartridge fuse link to BS.1362. BS.5733: 1995

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

13 AMP
FUSE UNIT
WITH
TAMPERPROOF
SCREW

BLANK INSERT

BUZZER UNIT
230 VOLT

BUZZER UNIT
24 VOLT

16 AMP
UNIVERSAL
SOCKET
NON UK



K4890KO WHI K4890KO BLK	K4880 BSS W K4880 BSS B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK
K4890KO WHI K4890KO BLK	K4880 PBR W K4880 PBR B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK
K4890KO WHI K4890KO BLK	K4880 SAA W K4880 SAA B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK
K4890KO WHI K4890KO BLK	K4880 POC W K4880 POC B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK
K4890KO WHI	K4880 WHI	K4000 WHI	K4001 WHI	K4901 WHI
K4890KO BLK	K4880 BLK	K4000 BLK	K4001 BLK	K4901 BLK
K4890KO BLK	K4880 PBZ B	K4000 BLK	K4001 BLK	K4901 BLK
K4890KO BLK	K4880 ABR B	K4000 BLK	K4001 BLK	K4901 BLK
K4890KO WHI K4890KO BLK	K4880 BBR K4880 BBR B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK
K4890KO WHI K4890KO BLK	K4880 BBR K4880 BBR B	K4000 WHI K4000 BLK	K4001 WHI K4001 BLK	K4901 WHI K4901 BLK

Fuse carrier comes with 13amp cartridge fuse link to BS.1362.
BS.5733: 1995

200-250V
BS.5733: 1995

21-36V
BS.5733: 1995

The Universal Socket does not incorporate an earth contact. Appliances needing earth connection (class 1 equipment) must NOT be used with this socket.

The socket is intended for use with BS, USA and CEE standard plugs.
BS.5733:1995









DECORATIVE

DIMMERS (CE MARKED)

	2 WAY SINGLE	2 WAY DOUBLE	2 WAY SINGLE	2 WAY DOUBLE
	230V a.c. 50Hz	230V a.c. 50Hz	230V a.c. 50Hz	230V a.c. 50Hz
	60W/VA MIN-	60W/VA MIN.	40W/VA MIN.	40W/VA MIN.
	500W/400VA	450W/360VA	300W/240VA	300W/240VA
	MAX	MAX FOR EACH DIMMER	MAX	MAX FOR EACH DIMMER

DIMMERS (NON UK)

	220V a.c. 50Hz	220V a.c. 50Hz
	250W	500W
	SINGLE	SINGLE



FINISHES

BRUSHED STAINLESS STEEL	K14301 BSS	K14302 BSS	K14521 BSS	K14522 BSS	K14531 BSS	K14541 BSS
POLISHED BRASS	K14301 PBR	K14302 PBR	K14521 PBR	K14522 PBR	K14531 PBR	K14541 PBR
SILVER ANODISED ALUMINIUM	K14301 SAA	K14302 SAA	K14521 SAA	K14522 SAA	K14531 SAA	K14541 SAA
POLISHED CHROME	K14301 POC	K14302 POC	K14521 POC	K14522 POC	K14531 POC	K14541 POC
WHITE	K14301 WHI	K14302 WHI	K14521 WHI	K14522 WHI	K14531 WHI	K14541 WHI
BLACK ANODISED ALUMINIUM	K14301 BLA	K14302 BLA	K14521 BLA	K14522 BLA	K14531 BLA	K14541 BLA
POLISHED BRONZE	K14301 PBZ	K14302 PBZ	K14521 PBZ	K14522 PBZ	K14531 PBZ	K14541 PBZ
ANTIQUÉ BRONZE	K14301 ABR	K14302 ABR	K14521 ABR	K14522 ABR	K14531 ABR	K14541 ABR
GOLD PLATED SPECIAL ORDER	K14301 GLD	K14302 GLD	K14521 GLD	K14522 GLD	K14531 GLD	K14541 GLD
BRUSHED BRASS SPECIAL ORDER	K14301 BBR	K14302 BBR	K14521 BBR	K14522 BBR	K14531 BBR	K14541 BBR

MOUNTING BOXES

FLUSH 866 ZIC – 35mm deep min

DIMENSIONS: 86 x 86mm

FIXING CENTRES: 60.3mm

MOUNTING BOXES

FLUSH 886 ZIC – 35mm deep min

DIMENSIONS: 86 x 146mm

FIXING CENTRES: 120.6mm

MOUNTING BOXES

FLUSH 866 ZIC – 35mm deep min

DIMENSIONS: 86 x 86mm

FIXING CENTRES: 60.3mm

MOUNTING BOXES

FLUSH 866 ZIC – 35mm deep min

DIMENSIONS: 86 x 86mm

FIXING CENTRES: 60.3mm

MOUNTING BOXES

FLUSH 866 ZIC – 35mm deep min

DIMENSIONS: 86 x 86mm

FIXING CENTRES: 60.3mm

MOUNTING BOXES

FLUSH 866 ZIC – 35mm deep min

DIMENSIONS: 86 x 86mm

FIXING CENTRES: 60.3mm

These dimmers employ the latest micro-controller based circuitry to provide electronic soft-start and overload protection. They are suitable for use with tungsten GLS lamps and for dimming low voltage halogen lamps via good quality, dimmable electronic or wire wound LV transformers. NOT SUITABLE FOR FLUORESCENT LOADS. Conform to latest standards BS EN 60669-2-1.








All dimmers have a combined push-on/push-off switch and rotary dimmer control, and are suitable for one or two-way switching. They are radio frequency interference suppressed to BS. EN 55015

Suitable for tungsten GLS lamps only. NOT SUITABLE FOR FLUORESCENT LOADS.

Suitable for tungsten GLS lamps only. NOT SUITABLE FOR FLUORESCENT LOADS.

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

220V a.c. 50Hz 1000W SINGLE	220V a.c. 60Hz 250W SINGLE	220V a.c. 60Hz 500W SINGLE	220V a.c. 60Hz 1000W SINGLE	127V a.c. 60Hz 250W SINGLE	127V a.c. 60Hz 450W SINGLE	127V a.c. 60Hz 650W SINGLE
-----------------------------------	----------------------------------	----------------------------------	-----------------------------------	----------------------------------	----------------------------------	----------------------------------

						
K14561 BSS	K14631 BSS	K14641 BSS	K14661 BSS	K14731 BSS	K14741 BSS	K14761 BSS
K14561 PBR	K14631 PBR	K14641 PBR	K14661 PBR	K14731 PBR	K14741 PBR	K14761 PBR
K14561 SAA	K14631 SAA	K14641 SAA	K14661 SAA	K14731 SAA	K14741 SAA	K14761 SAA
K14561 POC	K14631 POC	K14641 POC	K14661 POC	K14731 POC	K14741 POC	K14761 POC
K14561 WHI	K14631 WHI	K14641 WHI	K14661 WHI	K14731 WHI	K14741 WHI	K14761 WHI
K14561 BLA	K14631 BLA	K14641 BLA	K14661 BLA	K14731 BLA	K14741 BLA	K14761 BLA
K14561 PBZ	K14631 PBZ	K14641 PBZ	K14661 PBZ	K14731 PBZ	K14741 PBZ	K14761 PBZ
K14561 ABR	K14631 ABR	K14641 ABR	K14661 ABR	K14731 ABR	K14741 ABR	K14761 ABR
K14561 GLD	K14631 GLD	K14641 GLD	K14661 GLD	K14731 GLD	K14741 GLD	K14761 GLD
K14561 BBR	K14631 BBR	K14641 BBR	K14661 BBR	K14731 BBR	K14741 BBR	K14761 BBR

MOUNTING BOXES

FLUSH 866 ZIC –
35mm deep min
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
Suitable for tungsten
GLS lamps only.
NOT SUITABLE FOR
FLUORESCENT LOADS.

MOUNTING BOXES

FLUSH 866 ZIC –
35mm deep min
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
Suitable for tungsten
GLS lamps only.
NOT SUITABLE FOR
FLUORESCENT LOADS.

MOUNTING BOXES

FLUSH 866 ZIC –
35mm deep min
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
Suitable for tungsten
GLS lamps only.
NOT SUITABLE FOR
FLUORESCENT LOADS.

MOUNTING BOXES

FLUSH: 866 ZIC –
35mm deep min
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
Suitable for tungsten
GLS lamps only.
NOT SUITABLE FOR
FLUORESCENT LOADS.

MOUNTING BOXES

FLUSH: 866 ZIC –
35mm deep min
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
Suitable for tungsten
GLS lamps only.
NOT SUITABLE FOR
FLUORESCENT LOADS.

MOUNTING BOXES

FLUSH: 866 ZIC –
35mm deep min
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
Suitable for tungsten
GLS lamps only.
NOT SUITABLE FOR
FLUORESCENT LOADS.

MOUNTING BOXES

FLUSH: 886 ZIC –
35mm deep min
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
Suitable for tungsten
GLS lamps only.
NOT SUITABLE FOR
FLUORESCENT LOADS.


DECORATIVE

DATACOM FRONTPLATES

	EURO	EURO
	2 MODULE	2 MODULE
	50 X 50MM	22 X 37MM
1 MODULE	4 MODULE	(X 2)
25 X 50MM	100 X 50MM	

DATACOM MODULES

	RJ45	RJ45	
	CAT 5E (STP)	ANGLED	BNC
	SCREENED	CAT 5E (UTP)	50 Ω
EURO	EURO	EURO	EURO
1 MODULE	1 MODULE	1 MODULE	1 MODULE

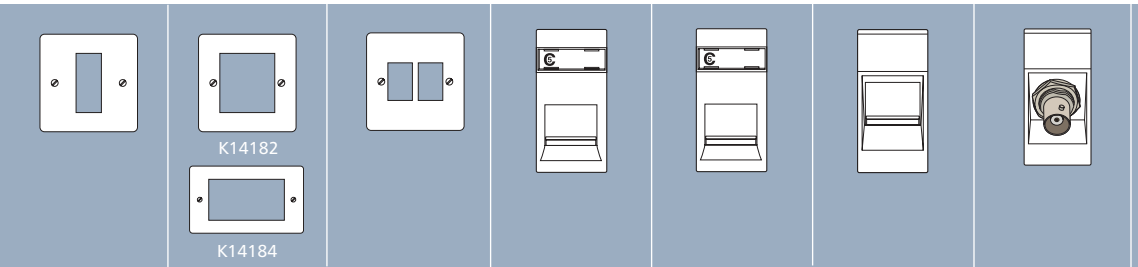

FINISHES

BRUSHED STAINLESS STEEL	STD OPT	K14181 BSS	K14182 BSS K14184 BSS	K14172 BSS W K14172 BSS B	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
POLISHED BRASS	OPT STD	K14181 PBR	K14182 PBR K14184 PBR	K14172 PBR W K14172 PBR B	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
SILVER ANODISED ALUMINIUM	STD OPT	K14181 SAA	K14182 SAA K14184 SAA	K14172 SAA W K14172 SAA B	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
POLISHED CHROME	OPT STD	K14181 POC	K14182 POC K14184 POC	K14172 POC W K14172 POC B	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
WHITE	STD	K14181 WHI	K14182 WHI K14184 WHI	K14172 WHI W	K5845 WHI	K5845s WHI	K5844 WHI	K5801 WHI
BLACK ANODISED ALUMINIUM	STD	K14181 BLA	K14182 BLA K14184 BLA	K14172 BLA B	K5845 BLK	K5845s BLK	K5844 WHI	K5801 BLK
POLISHED BRONZE	STD	K14181 PBZ	K14182 PBZ K14184 PBZ	K14172 PBZ B	K5845 BLK	K5845s BLK	K5844 WHI	K5801 BLK
ANTIQU BRONZE	STD	K14181 ABR	K14182 ABR K14184 ABR	K14172 ABR B	K5845 BLK	K5845s BLK	K5844 WHI	K5801 BLK
GOLD PLATED	OPT SPECIAL ORDER STD	K14181 GLD	K14182 GLD K14184 GLD	K14172 GLD W K14172 GLD B	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK
BRUSHED BRASS	OPT SPECIAL ORDER STD	K14181 BBR	K14182 BBR K14184 BBR	K14172 BBR W K14172 BBR B	K5845 WHI K5845 BLK	K5845s WHI K5845s BLK	K5844 WHI	K5801 WHI K5801 BLK

- W** White Inserts
- B** Black Inserts
- STD** Standard Black or
- STD** White
- OPT** Option Black or
- OPT** White

MOUNTING BOXES suitable for flush boxes to BS.4662:1970 and surface boxes to BS.5733:1995 Refer to appropriate module for minimum box depth

FIXING CENTRES 1G: 60.3mm

BS.5733:1995 where applicable

MOUNTING BOXES suitable for flush boxes to BS.4662:1970 and surface boxes to BS.5733:1995 Refer to appropriate module for minimum box depth

FIXING CENTRES 1G: 60.3mm 2G: 120.6mm

BS.5733:1995 where applicable

MOUNTING BOXES suitable for flush boxes to BS.4662:1970 and surface boxes to BS.5733:1995 Refer to appropriate module for minimum box depth

FIXING CENTRES 1G: 60.3mm

BS.5733:1995 where applicable

RJ45 Modules

Enhanced Cat 5 performance Suitable for both 568A and 568B wiring schemes Supplied with cable tie and cable anchors to secure wires in the connectors

MOUNTING BOXES Min. box depth 25mm TIA/EIA TS840A:Cat 5e TIA/EIA 568-A:Cat 5e ISO/IEC 11801:Cat 5e

50 Ohm crimp connector suitable for use with RG58, URM43, URM76 and Beldon 9907 type co-axial cables

MOUNTING BOXES Min. box depth 25mm

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

TV COAXIAL OUTLETS FOR DIGITAL TV

ISDN EURO 1 MODULE	RJ45 CAT 5E (UTP) LJU6C 1 MODULE	RJ45 CAT 5E (STP) SCREENED LJU6C 1 MODULE	ISDN LJU6C 1 MODULE	SINGLE IEC MALE EURO 1 MODULE	SINGLE IEC FEMALE EURO 1 MODULE	F-TYPE SATELLITE EURO 1 MODULE	TV/FM DIPLEXER EURO 2 MODULE	TV/FM/SAT TRIPLEXER EURO 2 MODULE
--------------------------	---	---	---------------------------	--	--	---	---------------------------------------	--

K5840 WHI K5840 BLK	K5745 WHI K5745 BLK	K5745s WHI K5745s BLK	K5740 WHI K5740 BLK	K5850 WHI K5850 BLK	K5851 WHI K5851 BLK	K5855 WHI K5855 BLK	K5852 WHI K5852 BLK	K5853 WHI K5853 BLK
K5840 WHI K5840 BLK	K5745 WHI K5745 BLK	K5745s WHI K5745s BLK	K5740 WHI K5740 BLK	K5850 WHI K5850 BLK	K5851 WHI K5851 BLK	K5855 WHI K5855 BLK	K5852 WHI K5852 BLK	K5853 WHI K5853 BLK
K5840 WHI K5840 BLK	K5745 WHI K5745 BLK	K5745s WHI K5745s BLK	K5740 WHI K5740 BLK	K5850 WHI K5850 BLK	K5851 WHI K5851 BLK	K5855 WHI K5855 BLK	K5852 WHI K5852 BLK	K5853 WHI K5853 BLK
K5840 WHI K5840 BLK	K5745 WHI K5745 BLK	K5745s WHI K5745s BLK	K5740 WHI K5740 BLK	K5850 WHI K5850 BLK	K5851 WHI K5851 BLK	K5855 WHI K5855 BLK	K5852 WHI K5852 BLK	K5853 WHI K5853 BLK
K5840 WHI	K5745 WHI	K5745s WHI	K5740 WHI	K5850 WHI	K5851 WHI	K5855 WHI	K5852 WHI	K5853 WHI
K5840 BLK	K5745 BLK	K5745s BLK	K5740 BLK	K5850 BLK	K5851 BLK	K5855 BLK	K5852 BLK	K5853 BLK
K5840 BLK	K5745 BLK	K5745s BLK	K5740 BLK	K5850 BLK	K5851 BLK	K5855 BLK	K5852 BLK	K5853 BLK
K5840 BLK	K5745 BLK	K5745s BLK	K5740 BLK	K5850 BLK	K5851 BLK	K5855 BLK	K5852 BLK	K5853 BLK
K5840 WHI K5840 BLK	K5745 WHI K5745 BLK	K5745s WHI K5745s BLK	K5740 WHI K5740 BLK	K5850 WHI K5850 BLK	K5851 WHI K5851 BLK	K5855 WHI K5855 BLK	K5852 WHI K5852 BLK	K5853 WHI K5853 BLK
K5840 WHI K5840 BLK	K5745 WHI K5745 BLK	K5745s WHI K5745s BLK	K5740 WHI K5740 BLK	K5850 WHI K5850 BLK	K5851 WHI K5851 BLK	K5855 WHI K5855 BLK	K5852 WHI K5852 BLK	K5853 WHI K5853 BLK

Incorporates line terminating resistor.
MOUNTING BOXES
Minimum depth 25mm

TIA/EIA TSB40A
TIA/EIA 568-A
ISO/IEC11801

Enhanced Cat 5 performance
Suitable for both 568A and 568B wiring schemes
Supplied with cable tie and cable anchors to secure wires in the connectors

MOUNTING BOXES
Min. box depth 25mm
TIA/EIA TSB40A:Cat 5e
TIA/EIA 568-A:Cat 5e
ISO/IEC11801:Cat 5e

Incorporates line terminating resistor.
MOUNTING BOXES
Minimum depth 25mm

TIA/EIA TSB40A
TIA/EIA 568-A
ISO/IEC11801

Fully screened non isolated TV outlets containing a combination of single, TV/FM Diplexer, TV/FM/SAT Triplexer and BT secondary telephone outlets for use within digital TV systems and interactive TV services. Single outlets for connection to a single TV, FM or Satellite co-axial aerial lead.

MOUNTING BOXES
Min box depth 32mm
DIMENSIONS
1 Module 25 x 50mm
2 Module 50 x 50mm

BS3041:1997/IEC 169-2:1965
BSEN 50083 & BS.5733:1995 where applicable

TV/FM diplexer units for connection to a single co-axial aerial lead with combined TV and FM signals.
TV/FM/SAT triplexer units for connection to a single co-axial aerial lead with combined TV,FM and Satellite signals

PERFORMANCE

Single	TV: DC to 950MHz Sat: DC to 1.75GHz
Diplexer	TV: DC to 68.5MHz & 174 to 862MHz FM: 87.5 to 108MHz
Triplexer	TV: 5 to 68.5 MHz & 174 to 862MHz FM: 87.5 to 108MHz Sat: DC to 200kHz & 950 to 2400MHz

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications

DECORATIVE

TELECOM
MODULES

MASTER
BT
EURO
1 MODULE

SECONDARY
BT
EURO
1 MODULE






RJ11/RJ12
EURO
1 MODULE

RJ11/RJ12
LJU6C
1 MODULE

BLANK
MODULES

EURO
2 MODULE
(50 X 50MM)

EURO
1 MODULE
(25 X 50MM)



FINISHES

BRUSHED STAINLESS STEEL	<input type="checkbox"/> STD	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
	<input type="checkbox"/> OPT	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
POLISHED BRASS	<input type="checkbox"/> OPT	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
	<input type="checkbox"/> STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K181 BLK
SILVER ANODISED ALUMINIUM	<input type="checkbox"/> STD	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
	<input type="checkbox"/> OPT	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
POLISHED CHROME	<input type="checkbox"/> OPT	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
	<input type="checkbox"/> STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
WHITE	<input type="checkbox"/> STD	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
BLACK ANODISED ALUMINIUM	<input type="checkbox"/> STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
POLISHED BRONZE	<input type="checkbox"/> STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
ANTIQUÉ BRONZE	<input type="checkbox"/> STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
GOLD PLATED	<input type="checkbox"/> OPT	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
	<input type="checkbox"/> SPECIAL ORDER <input type="checkbox"/> STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK
BRUSHED BRASS	<input type="checkbox"/> OPT	K5820 WHI	K5821 WHI	K5887 WHI	K5787 WHI	K180 WHI	K188 WHI
	<input type="checkbox"/> SPECIAL ORDER <input type="checkbox"/> STD	K5820 BLK	K5821 BLK	K5887 BLK	K5787 BLK	K188 BLK X 2	K188 BLK

W White Inserts

B Black Inserts

STD Standard Black or

STD White

OPT Option Black or

OPT White

MOUNTING BOXES:
Min. box depth 25mm
BS.6312 Pt.2

MOUNTING BOXES:
Min. box depth 25mm
BS.6312 Pt.2

Suitable for both RJ11
and RJ12 jacks.
RJ11: 4 wire
RJ12: 6 wire

MOUNTING BOXES:
Min. box depth 25mm
FCC68

Suitable for both RJ11
and RJ12 jacks.
RJ11: 4 wire
RJ12: 6 wire

MOUNTING BOXES:
Min. box depth 25mm
FCC68

MOUNTING BOXES:
Min. box depth 16mm
BS.5733:1995 where
applicable

MOUNTING BOXES:
Min. box depth 16mm
BS.5733:1995 where
applicable

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

TELECOM
TV/SATELLITE

EURO
1/2 MODULE
(12.5 X 50MM)

LJU6
1 MODULE
(22 X 37MM)

2A
ROUND PIN
WITH
TELEPHONE
SYMBOL

TV/FM
SINGLE
NON-ISOLATED

TV/FM
SINGLE
ISOLATED

TV/FM
TWIN
ISOLATED
DIPLEXER

SINGLE
F TYPE
SATELLITE

K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 BSS W K14340 BSS B	K14320 BSS W K14320 BSS B	K14321 BSS W K14321 BSS B	K14322 BSS W K14322 BSS B	K14325 BSS W K14325 BSS B
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 PBR W K14340 PBR B	K14320 PBR W K14320 PBR B	K14321 PBR W K14321 PBR B	K14322 PBR W K14322 PBR B	K14325 PBR W K14325 PBR B
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 SAA W K14340 SAA B	K14320 SAA W K14320 SAA B	K14321 SAA W K14321 SAA B	K14322 SAA W K14322 SAA B	K14325 SAA W K14325 SAA B
K186 WHI K186 BLK	K170WHI K170 BLK	K14340 POC W K14340 POC B	K14320 POC W K14320 POC B	K14321 POC W K14321 POC B	K14322 POC W K14322 POC B	K14325 POC W K14325 POC B
K186 WHI	K170 WHI	K14340 WHI W	K14320 WHI W	K14321 WHI W	K14322 WHI W	K14325 WHI W
K186 BLK	K170 BLK	K14340 BLA B	K14320 BLA B	K14321 BLA B	K14322 BLA B	K14325 BLA B
K186 BLK	K170 BLK	K14340 PBZ B	K14320 PBZ B	K14321 PBZ B	K14322 PBZ B	K14325 PBZ B
K186 BLK	K170 BLK	K14340 ABR B	K14320 ABR B	K14321 ABR B	K14322 ABR B	K14325 ABR B
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 GLD K14340 GLD B	K14320 GLD K14320 GLD B	K14321 GLD K14321 GLD B	K14322 GLD K14322 GLD B	K14325 GLD K14325 GLD B
K186 WHI K186 BLK	K170 WHI K170 BLK	K14340 BBR K14340 BBR B	K14320 BBR K14320 BBR B	K14321 BBR K14321 BBR B	K14322 BBR K14322 BBR B	K14325 BBR K14325 BBR B

MOUNTING BOXES:
Min. box depth 16mm
BS.5733:1995 where applicable

MOUNTING BOXES:
Min. box depth 16mm
BS.5733:1995 where applicable

Accepts standard BS.546 2 amp 2 pin + earth plug where 2 pins are used for telephone circuits and the earth pin is used to ensure correct polarity.

MOUNTING BOX
Flush 35mm: 866 ZIC
Flush 46mm: 877 ZIC
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS. 546: 1950.
(where relevant)

MOUNTING BOXES
FLUSH: 861 ZIC
SURFACE: K2140 WHI
Single outlet for connection to a single TV or FM co-axial aerial lead.
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS.3041:1977
IEC169-2:1965
BS.5733:1995 where applicable

MOUNTING BOXES
FLUSH: 861 ZIC
Provides safety isolation rated at 2000Va.c between aerial lead and socket. Single outlet for direct connection to a single TV or FM co-axial aerial lead.
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS.3041:1977
IEC169-2:1965
BS.5733:1995 where applicable

MOUNTING BOXES
FLUSH: 861 ZIC
Provides safety isolation rated at 2000Va.c between aerial lead and socket. Twin outlet with TV/FM diplexer for connection to single co-axial aerial lead with combined TV & FM signals.
DIMENSIONS: 86 x 86mm
FIXING CENTRES:
60.3mm
BS.3041:1977
IEC169-2:1965
BS.5733:1995 where applicable

MOUNTING BOXES
FLUSH: 861 ZIC
SURFACE: K2140 WHI
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
60.3mm
BS.3041:1977
IEC169-2:1965
BS.5733:1995 where applicable

DECORATIVE

GRID PLUS
SPARE MOUNTING FRAMES
SUPPLIED WITH FRONTPLATE

1 MODULE
MOUNTING
FRAME



2 MODULE
MOUNTING
FRAME

3 MODULE
MOUNTING
FRAME

4 MODULE
MOUNTING
FRAME

6 MODULE
MOUNTING
FRAME

1 MODULE
ARCHITRAVE
MOUNTING
FRAME



FINISHES

**BRUSHED
STAINLESS STEEL**

K14701

K14702

K14703

K14704

K14706

K14801

POLISHED BRASS

K14701

K14702

K14703

K14704

K14706

K14801

**SILVER ANODISED
ALUMINIUM**

K14701

K14702

K14703

K14704

K14706

K14801

**POLISHED
CHROME**

K14701

K14702

K14703

K14704

K14706

K14801

WHITE

K14701

K14702

K14703

K14704

K14706

K14801

**BLACK ANODISED
ALUMINIUM**

K14701

K14702

K14703

K14704

K14706

K14801

POLISHED BRONZE

K14701

K14702

K14703

K14704

K14706

K14801

ANTIQUÉ BRONZE

K14701

K14702

K14703

K14704

K14706

K14801

GOLD PLATED

SPECIAL ORDER

K14701

K14702

K14703

K14704

K14706

K14801

BRUSHED BRASS

SPECIAL ORDER

K14701

K14702

K14703

K14704

K14706

K14801

Will only fit
MK Mounting Box
3891 ZIC

LEAD TIMES
4 weeks: BSS, PBR, SAA
6 weeks: POC, WHI, BLA PBZ, BBR
8 weeks: ABR
Special Order: GLD
Lead time on application

BLANK PLATES

2 MODULE
ARCHITRAVE
MOUNTING
FRAME

1 GANG

2 GANG

		
K14802	K14330 BSS	K14329 BSS
K14802	K14330 PBR	K14329 PBR
K14802	K14330 SAA	K14329 SAA
K14802	K14330 POC	K14329 POC
K14802	K14330 WHI	K14329 WH
K14802	K14330 BLA	K14329 BLA
K14802	K14330 PBZ	K14329 PBZ
K14802	K14330 ABR	K14329 ABR
K14802	K14330 GLD	K14329 GLD
K14802	K14330 BBR	K14329 BBR



Will only fit
MK Mounting Box
3892 ZIC

MOUNTING BOXES

FLUSH:
866 ZIC
DIMENSIONS:
86 x 86mm
FIXING CENTRES:
1 gang: 60.3mm
BS.5733: 1995

MOUNTING BOXES

FLUSH:
886 ZIC
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
2 gang: 120.6mm
BS.5733: 1995