

PERIMETER AND DISTRIBUTION




TRUNKING

3 METRE LENGTHS
GRY WHI OR CLR*



SPARE TRUNKING LID

3 METRE LENGTHS
GRY OR WHI

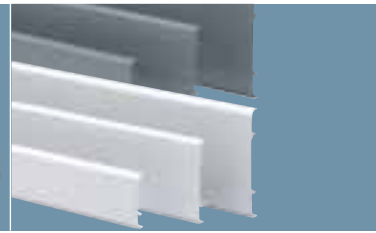

50 x 50mm	CLT/1	12m	CLT/50LID	12m
75 x 50mm	CLT/2	12m	CLT/50LID	12m
75 x 75mm	CLT/3	12m	CLT/75LID	12m
100 x 50mm	CLT/4	12m	CLT/50LID	12m
100 x 75mm	CLT/5	6m	CLT/75LID	12m
100 x 100mm	CLT/6	6m	CLT/100LID	12m
150 x 75mm	CLT/7	6m	CLT/75LID	12m
150 x 100mm	CLT/8	3m	CLT/100LID	12m
150 x 150mm	CLT/9	3m	CLT/150LID	12m

Ega Heavy Duty Industrial Cable Trunking is used extensively for industrial wiring purposes. It is available in a large variety of sizes and has found wide acceptance throughout the world. Its durability, safety and strength are well proven. All trunkings have a clip-on cover which enables fast, efficient installation.

Manufactured in accordance with BS 4678 Part 4.

STANDARD LENGTH: 3 metres


MATERIAL: PVC-U

COLOUR: Grey Clear and White


When ordering use colour suffix GRY CLR or WHI

FLAT TEE

MOULDED
GRY WHI OR CLR*




FABRICATED
GRY WHI OR CLR*



EXTERNAL TEE

FABRICATED
GRY OR WHI



INTERNAL TEE

FABRICATED
GRY OR WHI



*Clear trunking and fittings are only available for list numbers marked in blue. These items are also available in grey or white

50 x 50mm	FTF/1	1	FTE/1	1	FTI/1	1
75 x 50mm	FTF/2	1		1		1
75 x 75mm	FTF/3	1	FTE/3	1	FTI/3	1
100 x 50mm	FTF/4	1	FTE/4	1	FTI/4	1
100 x 75mm	FTF/5	1		1		1
100 x 100mm	FTF/6	1	FTE/6	1	FTI/6	1
150 x 75mm	FTF/7	1		1		1
150 x 100mm	FTF/8	1		1		1
150 x 150mm	FTF/9	1		1		1

FLAT CROSS


MOULDED
GRY WHI OR CLR*



FCU/1	1
FCU/2	1
FCU/3	1
FCU/5	1
FCU/6	1
FCU/7	1
FCU/9	1

FLAT ANGLE


MOULDED
GRY WHI OR CLR*



FAF/1	1
FAF/2	1
FAF/3	1
FAF/4	1
FAF/5	1
FAF/6	1
FAF/7	1
FAF/8	1
FAF/9	1

EXTERNAL CORNER


FABRICATED
GRY WHI OR CLR*



FAE/1*	1
FAE/2	1
FAE/3	1
FAE/4	1
FAE/5	1
FAE/6	1
FAE/7	1
FAE/8	1
FAE/9	1

INTERNAL CORNER

FABRICATED
GRY WHI OR CLR*



FAI/1*	1
FAI/2	1
FAI/3	1
FAI/4	1
FAI/5	1
FAI/6	1
FAI/7	1
FAI/8	1
FAI/9	1

*Moulded

*Moulded

REDUCERS

When selecting reducers the size of the small end must be specified. Be sure to state both trunking sizes. eg. TR/2/1

FABRICATED
GRY OR WHI



TR/21	1
TR/31	1
TR/41	1
TR/61 TR64	1
TR/86	1
TR/96	1

END CAP


MOULDED
GRY OR WHI



TEP/1	10
TEP/2	10
TEP/3	5
TEP/4	5
TEP/5	5
TEP/6	5
TEP/7*	1
TEP/8*	1
TEP/9*	1


COUPLINGS

EXTERNAL WITH RIVETS
MOULDED
GRY OR WHI




TCE/6	5
TCE/7*	1
TCE/8*	1
TCE/9*	1

INTERNAL PLAIN
GRY OR WHI



TCI/1	10
TCI/2	10
TCI/3	5
TCI/4	5
TCI/5	5
TCI/6	5

FLANGED
GRY OR WHI




TFC/1	5
TFC/3	5
TFC/4	5
TFC/6	1

ACCESSORIES

EGF/5 WHI 10
1 GANG ACCESSORY FRAME

EGF/6 WHI 10
2 GANG ACCESSORY FRAME



TPR/I GRY 200
PUSH IN RIVETS
GREY PLASTIC
HOLE SIZE 7.2MM

TPR/I WHI 200
PUSH IN RIVETS
WHITE PLASTIC
HOLE SIZE 7.2MM

RK/1 100
EXPANDING RIVETS
WHITE NYLON
DRILL SIZE 10

*FABRICATED

* FABRICATED Couplings must be purchased separately for fabricated fittings. Moulded fittings do not require couplings