


CONDUIT AND MINI

EGAFLEX™

The Egaflex PVC-U conduit range is a corrugated flexible system which can be used for the connection of vibrating equipment or to provide tight bends for interconnecting conduits. The range can be surface mounted or cast-in concrete and can also be used with standard conduit fittings.

Manufactured in accordance with BS.4607 Part 3.

MATERIAL: PVC-U
COLOUR: White

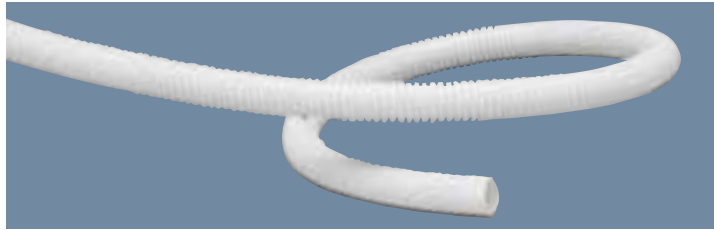CORRUGATED
PVC-U
CONDUITADAPTOR
NYLON

16mm	EF/1 WHI	50m	FAB/1 WHI	50
20mm	EF/2 WHI	50m	FAB/2 WHI	50
25mm	EF/3 WHI	50m	FAB/3 WHI	50
32mm	EF/4 WHI	25m	FAB/4 WHI	10

RECTANGULAR
CHANNELLING


2 METRE LENGTHS

WALL THICKNESS: 0.9mm.

MATERIAL: PVC-U

COLOUR: White.

STANDARD LENGTH: 2 metres.
Other lengths can be supplied against quantity orders.

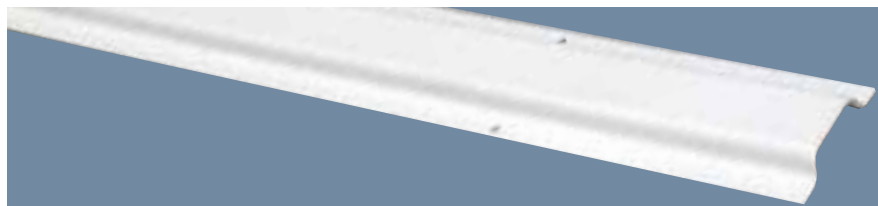

12mm	(8mm depth approx)	REC/1	150m
25mm	(8mm depth approx)	REC/2	150m
38mm	(9.5mm depth approx)	REC/3	76m