

SERVICE POLES AND POSTS

PRESTIGE POWER POLES

Power Poles stand between the floor and ceiling and can be integrated with Powerlink Underfloor as part of a co-ordinated Cable Management system. They are particularly suited to raised floors and suspended ceilings, but can also be used with solid floors and ceilings.

Power Poles are secured to the floor by a load plate. A jacking assembly allows adjustment for varying ceiling heights as well as to secure it to the ceiling.


An extension bar is required for stability where the height exceeds 3.6 metres.

Outlet boxes can be located at virtually any height on the poles, so power and data points, light switches and accessory housings can be positioned quickly and easily at the optimum level for efficient operation.

PPA/100 WHI
POWER POLE ASSEMBLY WITH WHITE PAINTED ALUMINIUM BODY, WHITE PVC-U COVER AND 6 OUTLET BOXES



PPA/100 ALM
POWER POLE ASSEMBLY WITH ANODISED ALUMINIUM BODY, WHITE AND CHARCOAL PVC-U COVERS AND 6 OUTLET BOXES

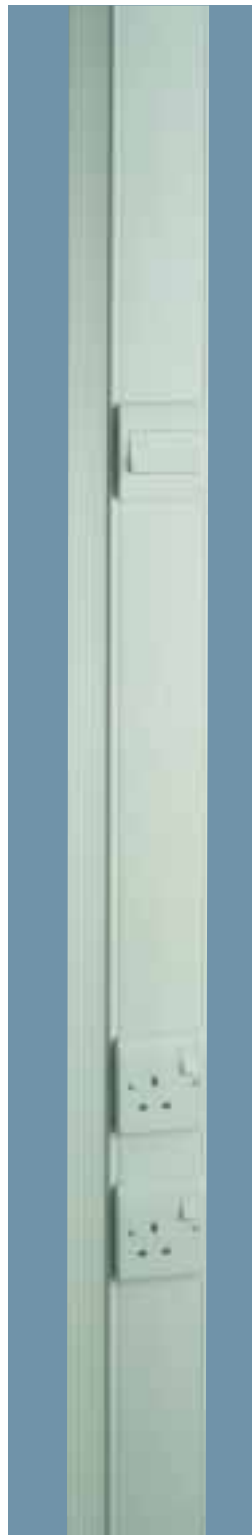

PRESTIGE POWER POSTS

Power Posts stand neatly on the floor and accept cables from below. They are ideal for raised floors but can also be installed on solid surfaces, fed for example from Prestige Screeded Floor Systems.

They fit unobtrusively under desks, and a single unit will provide up to twelve outlets for any combination of power and data points, light switches and accessory housings.

PPT/650 WHI
POWER POST ASSEMBLY WITH WHITE PAINTED ALUMINIUM BODY, WHITE PVC-U COVER AND 5 OUTLET BOXES



PPT/650 ALM
POWER POST ASSEMBLY WITH ANODISED ALUMINIUM BODY, WHITE AND CHARCOAL PVC-U COVERS AND 5 OUTLET BOXES



ACCESSORIES FOR POLES AND POSTS



PPC/20



PPC/MH WHI



PPC/40



PPK/1



PPC/50

PPC/20
OUTLET BOX ASSEMBLY

1

PPC/10
DIVIDING STRIP

3m

PPC/40
TOP END COLLAR

1

PPC/50
END LOAD PLATE

1

PPC/MH WHI
PPC/MH CHA

1

1

MCB/RCD HOUSING
AVAILABLE IN A CHOICE OF TWO
COLOURS, WHITE OR CHARCOAL
Accepts up to 4 x one module
Sentry products, excluding single
module RCBO's, up to a maximum
combined rating of 63 amps
(see pages 340-347).

The Housing unit includes fixing kit,
Sentry mounting DIN rail and cover
moulding.

PPA/100LID WHI

2

PPA/100LID CHA

2

SPARE LIDS
3.6M LENGTHS

PPK/1
EXTENSION BAR
FIXING KIT (0.9 METRE) FOR
INSTALLATIONS WHERE THE
HEIGHT FROM FLOOR TO
SOLID CEILING (OR TO STRUCTURAL
CONCRETE WHERE SUSPENDED
CEILINGS ARE INSTALLED)
EXCEEDS 3.6 METRES.

To allow flexibility in matching interior design and colour schemes, the pole and post bodies are available in a white epoxy coated or natural anodised aluminium finish, and the PVC-U component covers come in charcoal or white.

The bodies accept a variety of co-ordinated accessories from MK's slim profile Accent range and from the Logic Plus range, as well as all other MK accessory ranges. A matching MCB/RCD housing unit is available, also in charcoal or white.