



COMPACT FLUORESCENT DOWNLIGHTER

MINILUX

13W 18W 26W






MINILUX



Minilux is a low energy alternative to mains & low voltage tungsten downlights.

Specify Minilux with its range of attachments to provide zonal identification around cash points, reception desks & circulation areas or for general low-level lighting in restaurants, corridors, rest rooms etc.

Minilux is equipped with high frequency control gear as standard for 26, 18 & 13 watt (4 pin) TC-T lamps (lamp not included).

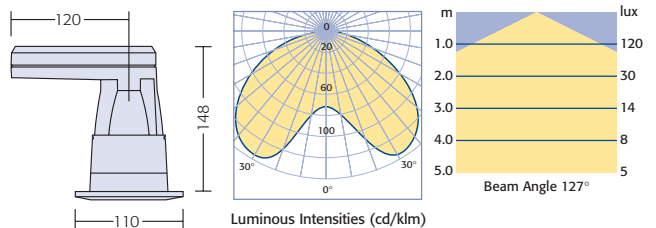

Cutout = 90-92mm
Weight = 0.35kg

Data for 26 watt

Features and Benefits

- Lightweight, injection moulded, main housing pre-wired with 1.0m long flying lead
- Class II insulation. No earth required
- High frequency electronic control gear. 25% energy saving compared to electromagnetic gear
- Ceiling clips provide 'no tool' push fit into ceiling
- Specular, faceted reflector
- Choice of bayonet fix bezels in white, brass & chrome
- Coloured Halo Ring attachments (see opposite)
- Opal & clear prismatic covers (see opposite). Provides IP44 protection from underside of mounting surface
- 3 hour self-contained, maintained, emergency lighting facility (see over)



CENT DOWNLIGHTER


Optional Accessories




Opal Cover **MOC70**

Injection moulded white opal polycarbonate cover with prismatic sides & base. Snaps into bezel to provide IP44 protection & a halo of spill light around luminaire.

MOC70 shown fitted to MDX18 luminaire.



Luminous Intensities (cd/klm)




Data for 26 watt c/w Opal Cover




Prismatic Cover **MCC71**

Injection moulded clear polycarbonate cover with prismatic sides & base. Snaps into bezel to provide IP44 protection & a halo of spill light around luminaire.

MCC71 shown fitted to MDX20 luminaire.



Luminous Intensities (cd/klm)



Data for 26 watt c/w Prismatic Cover




Halo Ring


Injection moulded halo rings in contemporary colours. Fits into bezel to provide coloured halo effect around luminaire.

See below for range.

MHR74 shown fitted to MDX27 luminaire.



Luminous Intensities (cd/klm)



Data for 26 watt c/w Halo Ring



MHR70
Blue



MHR71
Amber



MHR72
Purple



MHR73
Green



MHR74
Smoked Grey

Lamp (not included)	Lamp Cap 4-pin	Lamp Lumens (nom)	White Bezel	Chrome Bezel	Brass Bezel
1 x 26W TC-T	GX24q-3	1800	MDX26	MDX27	MDX28
1 x 18W TC-T	GX24q-2	1200	MDX18	MDX19	MDX20
1 x 13W TC-T	GX24q-1	900	MDX13	MDX14	MDX15

Photometric data

Full photometric data is available on request.

Lighting Design

The Powerlite Lighting Design Service is also available to present accurate representations of your lighting requirements. Contact design@powerlite.net

COMPACT FLUORESCENT DOWNLIGHTER



Remote Emergency Pack

Pack consists of high frequency control gear & emergency inverter module in a steel enclosure with separate battery pack for 3 hour self contained, maintained emergency lighting, pre-wired to luminaire & remote charger LED.

To specify add suffix **/EM3** to luminaire code e.g. **MDX18/EM3**



LED housing



T Connector

Minilux can be supplied (to order) with an optional T connector for simple plug in installation.

To specify add suffix **/TC** to luminaire code e.g. **MDX26/TC**

