

Fan controls and accessories


Door Switch

In-built microswitch activates fan when door is opened



Wall Grilles

From 152mm to 380mm square in a range of colours



Passive Infra-red Sensors

PIRT- for fans without in-built timer
PIR- for fans with in-built timer



Remote Switches

A range of switches for manual control



Wall Grilles with Spigots

From 140mm to 175mm square in a range of colours



Circular Air Valves

Full range of sizes available



Speed Controllers

A range of speed controllers for precise control




Roof Cowl & Weathering Slates

Full range available



Wall and Window Fixing Kits

Full range of sizes available



Humidity Controller

Automatic controller for all fans without in-built humidistats



Backdraft flaps

100mm & 150mm diameter available




Condensation Trap

100mm and 150mm diameter available



All controls are suitable for 220-240 Volt, 1PH, 50Hz supply


Ducting

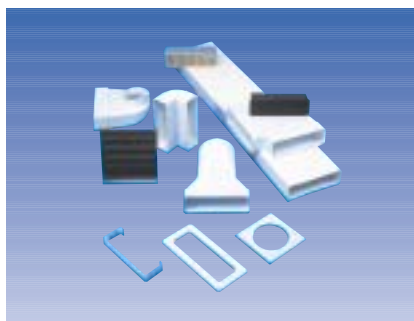

Plastic Flat Ducting

A comprehensive range of accessories and fittings in a modular design.

Airflat Ducting is manufactured from the highest quality flame-retardant materials to BS 476, Parts 6, 7 & 20 and provides low profile sections for easier and unobtrusive installation.

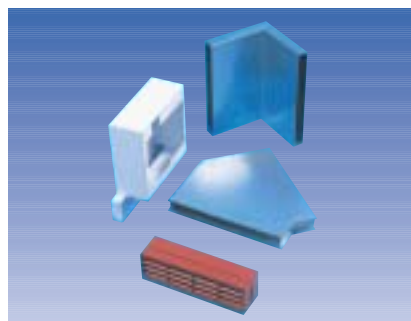


Steel Flat Ducting

Galvanised steel ducting for applications that require a slim profile and full flame retardancy.

Where conventional ducting is not suitable, the Flatduct System offers two sizes - 228 x 25mm and 305 x 25mm.

The range features a simple push-on method of fixing.

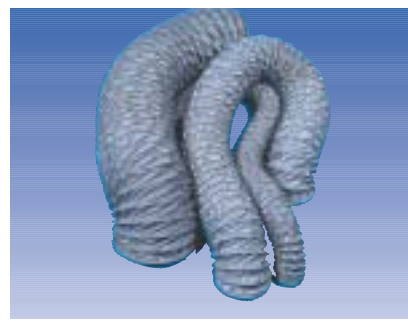

Airflex Ducting

Flexible corrosion-resistant ducting, in a choice of sizes and lengths for general purpose applications.

Available in grey PVC coated fibre-glass fabric or aluminium foil. Optional extras include joining pieces and worm drive clips. The operating temperature range is -5°C to +90°C. The fire retardant ducting materials meet the requirements of BS 476, Parts 6, 7 & 20.

AIRFLOW™

SPECIALISTS IN AIR MOVEMENT TECHNOLOGY

Airflow Developments Limited, Lancaster Road, Cressex Business Park, High Wycombe, Buckinghamshire HP12 3QP, England
Telephone: (Int +44) (UK 0) 1494 525252 - Facsimile: (Int +44) (UK 0) 1494 461073 - E-Mail: info@airflow.co.uk - Web Site: http://www.airflow.co.uk

Airflow Lufttechnik GmbH,
Postfach 1208, D-53349 Rheinbach, Germany.
Telefon: 02226/9205-0, Telefax: 02226/9205-11

Airflow Technical Products Inc.,
P.O. Box 372, 219 Route 206, Andover NJ 07821, USA.
Telephone: 973-786-6386. Fax: 973-786-7586

Airflow Lufttechnik GmbH,
o.s. Praha, Hostynská 520, 108 00 Praha 10 - Maleovice,
Czech republic. Telefon a fax 02-77 22 30

Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request.



CERTIFICATE 152
BS5750 ISO9001 EN29001