


ceiling accessories

A complete range of
high quality robust
ceiling accessories,
offering durability,
practicality and ease of
installation



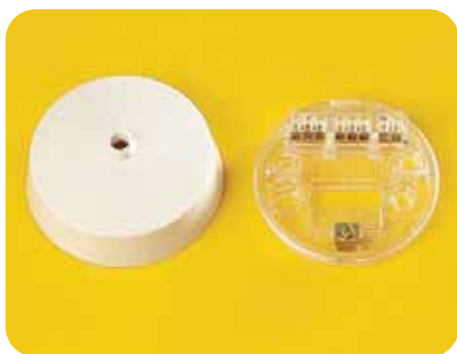

CEILING ROSES

Catalogue Number	Description	Carton Quantity
561	Ceiling rose polycarbonate base 3.5" diameter	10
661	Ceiling rose polycarbonate base 3" diameter	10

- Base moulded in clear polycarbonate
- Cover moulded in satin finish urea
- Base incorporates two + loop-in + earth terminals
- Spin-on cover with smooth cable entry for maximum protection of pendant conductor insulation
- Eight "in-line" terminals all with captive screws
- Wiring aperture in base with extra knockout for ease of wiring
- Large capacity earth terminal with locking terminal screw
- Manufactured to BS67



PENDANT SETS (T2)

Catalogue Number	Description	Carton Quantity
566	Pendant set with 6" flex and 3.5" base	10
569	Pendant set with 9" flex and 3.5" base	10
666	Pendant set with 6" flex and 3" base	10
669	Pendant set with 9" flex and 3" base	10
6612	Pendant set with 12" flex and 3" base	10
720H6	720H6 + 6" flex only	25

- Manufactured to BS67 and BSEN61184
- 0.75mm pendant flex heat resistant to BS6141
- Base incorporates two + loop-in + earth terminals
- Spin-on cover with smooth cable entry for maximum protection of pendant conductor insulation
- Eight "in-line" terminals all with captive screws
- Wiring aperture in base with extra knockout for ease of wiring
- Large capacity earth terminal with locking terminal screw
- Manufactured to BS67



LOW ENERGY PENDANT SETS

Catalogue Number	Description	Carton Quantity
666/ES13W	13 Watt energy saving pendant (excluding lamp)	1
666/ES18W	18 Watt energy saving pendant (excluding lamp)	1

- Manufactured to BS EN 60598
- 10 Watt and 26 Watt variants also available
- G24q lamp holder
- Low energy consumption
- 13 Watt equivalent to 60 Watt incandescent, 18 Watt equivalent to 100 Watt
- Product conforms to all relevant British and European Standards and EMC requirements



BATTENHOLDERS ENCLOSED (T2)

Catalogue Number	Description	Carton Quantity
763	2 terminal body, 3 terminals + earth in base, PVC tails, HO skirt	10
767	2 terminal body angled, 3 terminals + earth in base, and PVC tails, HO skirt	10

- Manufactured to BS EN 61184
- T2 temperature rated
- Large capacity earth terminal with locking terminal screw
- Wiring aperture in base with extra knockout for ease of wiring
- Diameter of batten lampholder is 80mm (3")
- Wired with heat resistant wire
- Base cover can be removed without removing HO skirt



BATTENHOLDERS (T2)

Catalogue Number	Description	Carton Quantity
752	3 terminals with short skirt	10
753	3 terminals with HO skirt	10
747	3 terminal angled with HO skirt	10
748	3 terminal angled with short skirt	10
201E	Back plate-deep type, 6 knockouts + earth terminal suitable for 747 and 748	

- Manufactured to BS EN 61184



LAMP HOLDERS - HEAT RESISTANT (T2)

Catalogue Number	Description	Carton Quantity
720	Cord grip with short skirt	20
721	Cord grip with HO skirt	20
725	½" 26 BSB threaded entry with short skirt	20
728H	10mm threaded entry with short skirt	20
252	Pushbar lamp holder-switched ½" 26 BSB with threaded entry and short skirt	20
7368	Short skirt	100
7369	HO skirt	100

- Manufactured to BS EN 61184
- 2A at 250V AC temperature rating
- Moulded in robust fully insulating plastic
- Positive cord-grip



CEILING SWITCHES

Catalogue Number	Description	Carton Quantity
801	6 amp 1 gang 1 way ceiling switch	10
802	6 amp 1 gang 2 way ceiling switch	10
803	45 amp double pole ceiling switch with neon indicator	10
804	10 amp triple pole fan isolator ceiling switch	10

- Manufactured to BS EN 60669 -01
- Supplied with approximately 1.5 metres of cord
- Individually bagged



DECORATIVE CEILING ROSES

Catalogue Number	Description	Carton Quantity
661BRG	Ceiling rose with polycarbonate 3" diameter base Brass finish cover	10
661CH	Ceiling rose with polycarbonate 3" diameter base Chrome finish cover	10
661ST	Ceiling rose with polycarbonate 3" diameter Steel finish cover	10



DECORATIVE CEILING SWITCHES

Catalogue Number	Description	Carton Quantity
802BRG	6 amp 2 way ceiling switch Brass finish	10
802CH	6 amp 2 way ceiling switch Chrome finish	10
802ST	6 amp 2 way ceiling switch Steel finish	10





Guarantee

Guarantee

BG Electrical products are guaranteed against faulty materials and workmanship for a period of 25 years from date of delivery: products will be repaired or (at BG Electrical's discretion) replacements will be supplied or (at BG Electrical's discretion) a credit note will be issued. This guarantee is subject to BG Electrical's conditions of sale and in particular to the following conditions being met:

1. Notification of any defect is given to BG Electrical as soon as reasonably practicable after becoming apparent, and the products then returned to BG Electrical.
2. The products have only been operated under normal operating conditions and have only been subject to normal use.
3. No work (other than normal and proper maintenance) has been carried out to the products without BG Electrical's prior written consent.
4. The products have been assembled or incorporated into other goods by a qualified and recognised electrician and only in accordance with any instructions issued by BG Electrical.
5. The defect has not arisen from an item manufactured or supplied by a person other than BG Electrical.

This guarantee does not affect any consumer statutory rights.