



# ACCESSORIES - OASIS SERIES -


## Radio Transmitter and Receiver

Radio transmitter to control ceiling fans already supplied with a receiver RCV3.

The TRM 3 functions are: ON/OFF motor, increasing and decreasing of speed, reversibility, ON/OFF light kit when available.

Can operate 3 groups of ceiling fan simultaneously.

Model	Ref.
<b>TRM3</b>	OW 916 9
<b>RCV3</b>	OW 917 7

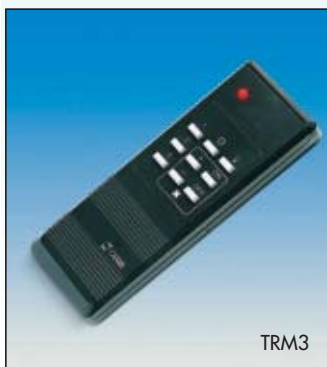

## Light kit

Suitable for ceiling fans models 3KR and 4KR. To be fitted with a 150 W bulb with E 27 connector.

Available in White, Silver and Golden.

Model	Ref.
<b>LIGHT KIT WHITE</b>	OW 810 4
<b>LIGHT KIT SILVER</b>	OW 811 2
<b>LIGHT KIT GOLDEN</b>	OW 812 0



## 12 Volts Electronic Controller

3 speed + reversibility + light 12 Volts Electronic Controller, complete with relevant Receiving Kit to be installed inside the ceiling fan canopy.

Suitable for the following models only: 3KR and 4KR.

Allows the ceiling fan to be installed in any unsafe and electrically hazardous place like wet floors, water splashes, high level of humidity etc.

In fact this SELV (Safety Extra Low Voltage) system gives a total electric security dividing main of the fan to the 12 V of the controller.

Model	Ref.
<b>12V SELV ELECTRONIC CONTROLLER</b>	OW 910 2



## Controllers

RG 5 Oasis is suitable to control the ON/OFF function, 5 speeds, reversibility and the ON/OFF of the light when the light Kit is installed. RG E, suitable for industrial environments only, is an electronic controller able to vary the speed continuously and can drive the reversibility functions of the fans. Both controllers can be recessed through a dedicated accessory.

Model	Ref.
<b>RG 5 OASIS</b>	OW 316 2
<b>RG E</b>	OW 317 0



**Recessed Kit** Wall recessed Kit O.ERRE regulators - ref. OW 905 2

**Rods** Accessories to adjust distances between blades of ventilators and ceiling - on request.