



AXIAL FANS WITH AUTOMATIC SHUTTER - IPX4 STANDARDMATIC E MINIMATIC





AXIAL FANS WITH AUTOMATIC SHUTTER - IPX4 STANDARDMATIC E MINIMATIC

- Axial fans to extract air and fumes directly outside with automatic opening of shutter.
- Can be wall, ceiling and panel mounted.
- In accordance with EN 60335-2-80.
- Grille made in shining ABS material.
- IPX4 protected for areas with high humidity.

• **Standardmatic T and Minimatic T**, with electronic timer adjustable from 2 to 20 minutes approx.

• All **Standardmatic and Minimatic 10 and 12** have threaded spigots to allow panel mounting by locking ring.


• **Minimatic range**, motor with ball bearings.



Window kit including fixing screws for installation on window (5 mm).

| Model | Ref. |
|----------------------|----------|
| Window kit 10 | OW 874 0 |
| Window kit 12 | OW 875 7 |
| Window kit 15 | OW 876 5 |


Dimensions

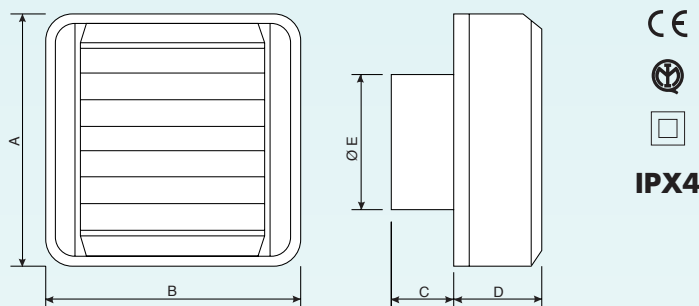

| Model | A | B | C | D | E |
|---|-----|-----|----|----|-------|
| Standardmatic - Minimatic 10/10T | 154 | 154 | 45 | 51 | ∅ 98 |
| Standardmatic - Minimatic 12/12T | 174 | 174 | 45 | 51 | ∅ 118 |
| Standardmatic - Minimatic 15/15T | 210 | 210 | 62 | 54 | ∅ 146 |



Low motion and noiseless opening of shutter.

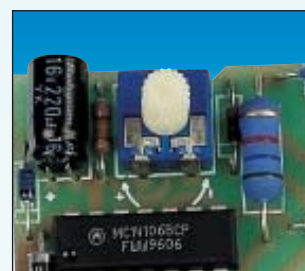

For **Timer range (T)**, easy timer adjustment by small control knob.

Technical Data

| Model | Ref. | Hole diameter mm | Flow rare m ³ /h | W | Nominal voltage and frequency | Max pressure mm H ₂ O | dB (A) at 3 m | Weight kg |
|--------------------------|----------|------------------|-----------------------------|----|-------------------------------|----------------------------------|---------------|-----------|
| MINIMATIC 10 | OW 185 1 | 100 | 90 | 14 | 220-240V 50Hz | 3 | 38 | 0,7 |
| MINIMATIC 10T | OW 186 9 | 100 | 90 | 14 | 220-240V 50Hz | 3 | 38 | 0,7 |
| MINIMATIC 12 | OW 187 7 | 120 | 130 | 21 | 220-240V 50Hz | 4 | 39 | 0,85 |
| MINIMATIC 12T | OW 189 3 | 120 | 130 | 21 | 220-240V 50Hz | 4 | 39 | 0,85 |
| MINIMATIC 15 | OW 845 0 | 150 | 230 | 45 | 220-240V 50Hz | 4,2 | 44 | 1,2 |
| MINIMATIC 15T | OW 846 8 | 150 | 230 | 45 | 220-240V 50Hz | 4,2 | 44 | 1,2 |
| STANDARDMATIC 10 | OW 166 1 | 100 | 90 | 21 | 220-240V 50Hz | 2,5 | 38 | 0,7 |
| STANDARDMATIC 10T | OW 167 9 | 100 | 90 | 21 | 220-240V 50Hz | 2,5 | 38 | 0,7 |
| STANDARDMATIC 12 | OW 168 7 | 120 | 130 | 23 | 220-240V 50Hz | 4,2 | 39 | 0,85 |
| STANDARDMATIC 12T | OW 169 5 | 120 | 130 | 23 | 220-240V 50Hz | 4,2 | 39 | 0,85 |
| STANDARDMATIC 15 | OW 170 3 | 150 | 230 | 36 | 220-240V 50Hz | 4,2 | 44 | 1,2 |
| STANDARDMATIC 15T | OW 171 1 | 150 | 230 | 36 | 220-240V 50Hz | 4,2 | 44 | 1,2 |