

# Avalon

Floodlights



## A comprehensive range of SON and HQI floodlights.

- Sophisticated Aesthetic design
- Slimline aluminium version available (Grey body)
- Black cast aluminium body or polycarbonate on specific models
- Comprehensive range of discharge lamp types and wattages
- Fitting complete with lamps
- Front glass hinged for ease of installation and lamp replacement
- Body sealed to IP65

CE IP65



25  
Years

Dextra

# Avalon

## Floodlights

AVAS/H 70 - 400w



AVAS/70EL PC



AVADES/H 70 -150w



Dextra's contemporary floodlight range has been designed to accommodate the majority of clients requirements.

Option of economic high pressure sodium or high colour rendering metal halide.

Thermal cutouts used on the majority of fittings.

Black body as standard. (Grey on Slimline)

Other colour options may be available on request.

SON and HQI available from 70 to 400w.

All fittings come complete with lamps as standard.

Body sealed to IP65.

Ideal for use in car parks, warehouses and other industrial areas etc.

Manufactured to BSEN 60598 specification and CE Marked to comply with EMC regulations.

A free comprehensive design facility can be accessed through our lighting services department.

An economic 70w elliptical Son lamp only version with Polycarbonate base and diffuser is available for cost conscious projects.

Sylvania Twin Arc Son lamps are available on special requests. N.B. Triple pulse ignitor must also be specified.


## Order Details

### Details

Order Code	Body Type	Lamp	Weight	Dimensions		
				A	B	C
AVAM50EL PC	Polycarbonate	E27 50W MBRU	3.13	212	245	300
AVAS70EL PC	Polycarbonate	E27 70W SON - E	3.45	212	245	300
AVAM80EL PC	Polycarbonate	E27 80W MBRU	3.29	212	245	300
AVAS70L	Aluminium	E27 70W SON - E	4.70	125	265	365
AVAH70L	Aluminium	E27 70W HQI - T	4.65	125	265	365
AVAS150L	Aluminium	E40 150W SON - T	8.80	170	375	445
AVAH150L	Aluminium	E40 150W HQI - T	8.80	170	375	445
AVAS250L	Aluminium	E40 250W SON - T	9.65	170	375	445
AVAH250L	Aluminium	E40 250W HQI - T	8.75	170	375	445
AVAS400L	Aluminium	E40 400W SON - T	11.15	170	375	445
AVAH400L	Aluminium	E40 400W HQI - T	9.70	170	375	445
AVADES70L*	Aluminium Slimline	RX7s 70W NAV - TS	3.75	84	230	350
AVADEH70L*	Aluminium Slimline	RX7s 70W HQI - TS	3.75	84	230	350
AVADES150L*	Aluminium Slimline	RX7s-24 150W NAV - TS	4.55	84	230	350
AVADEH150L*	Aluminium Slimline	RX7s-24 150W HQI - TS	4.55	84	230	350

### Accessories - Suffix

Code	Description
TI	Timed Ignitor
PH	Photocell
* Not available with Photocell	

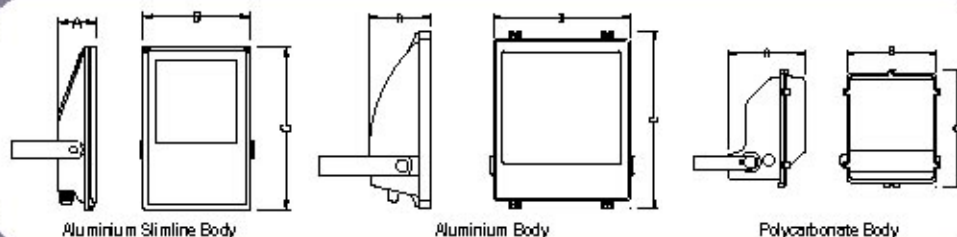

For application advice and lighting designs please contact our lighting services department on: **01747 858120**

The information, technical specification and photography contained in this literature is representative of general models correct at the time of going to press. In line with our policy of continuous improvement Dextra Lighting Systems PLC reserve the right to make any modifications necessary to parts or details without prior notice. The information contained in this publication does not form part of any contract.  
02-0104

# Dextra

For further information contact:

Dextra Lighting Systems plc

Brickfields Business Park, Gillingham, Dorset SP8 4PX

Direct Sales: 01747 858100 Freephone Fax: 0800 7838444

Email: sales@dextralighting.co.uk Website: www.dextralighting.co.uk